



# XGA6012-6 S

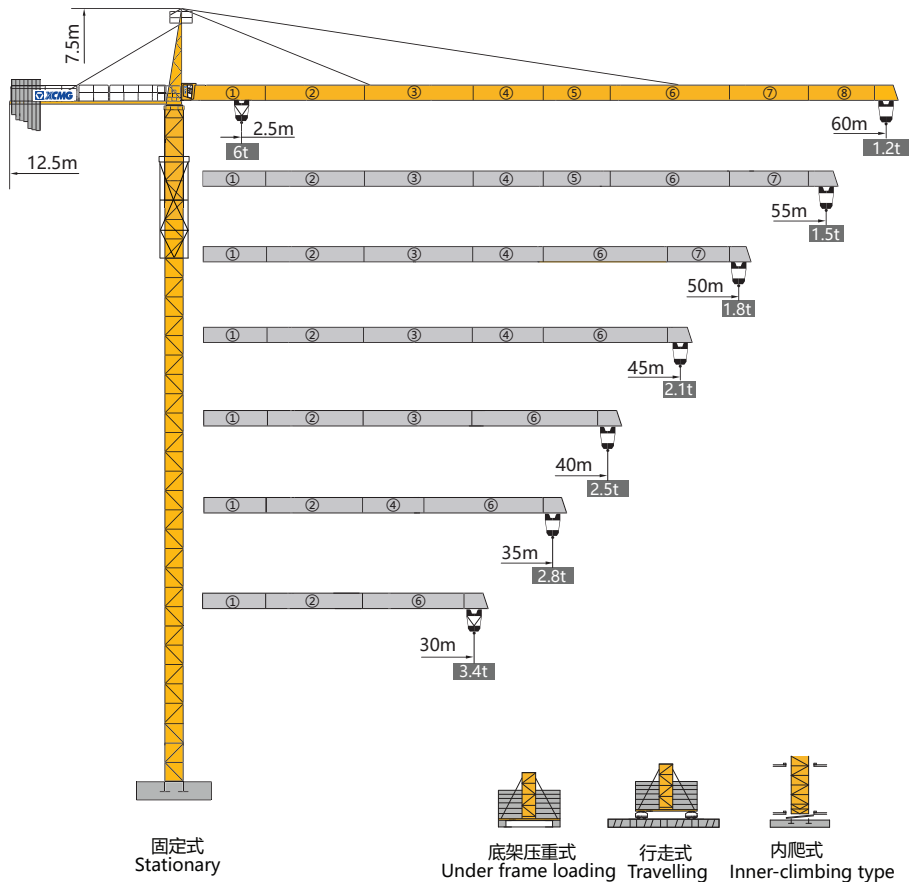

\* 可变换的其他安装方式与我们协商 Mounting possibilities Consult us.


塔顶系列 Topkit

## 塔身与反力 Masts and Reactions

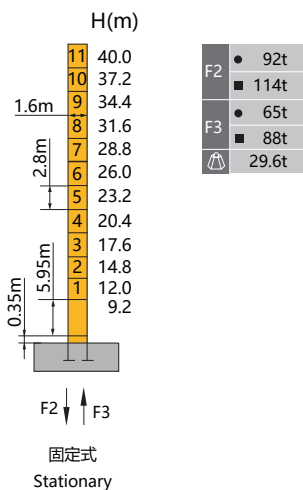





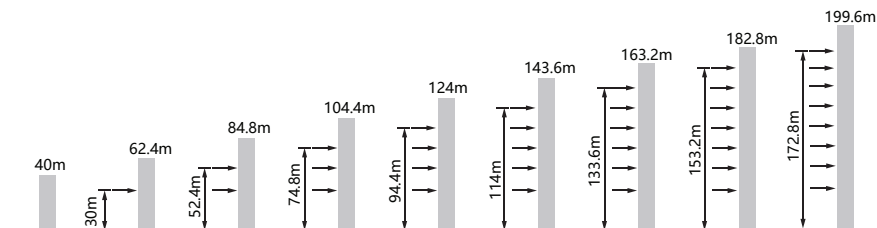









H(m) 吊钩高度 Height of the hook ● 工作状态反力 Reactions in service ■ 非工作状态反力 Reactions out of service  
⚠ 独立高度最大臂长的自重 (不含平衡重, 不含压重)  
Weight with max free standing, max jib (without counter-jib ballast and load)

## 附着 Anchorages






\* 如需其他的高度, 请与我们联系。For other heights, consult us please.







## 起重特性 Load Diagrams

起重臂 jib R (m)	$\alpha$	R <sub>min</sub> m	R(C <sub>max</sub> ) m	C <sub>max</sub> kg	幅度 (m) / 起重重量 (kg)												
					Range(m) / Loading (kg)												
					5	10	15	20	25	30	35	40	45	50	55	60	
60		2.5	29.9	3000	3000						2996	2487	2092	1794	1556	1361	1200
		2.5	16.4	6000	6000			4790	3679	2948	2430	2044	1746	1508	1313	1152	
55		2.5	32.3	3000	3000						2729	2311	1988	1730	1520		
		2.5	17.7	6000	6000			5296	4061	3248	2681	2262	1940	1682	1472		
50		2.5	33.3	3000	3000						2830	2399	2066	1800			
		2.5	18.3	6000	6000			5416	4176	3360	2782	2351	2018	1752			
45		2.5	33.7	3000	3000						2874	2438	2100				
		2.5	18.5	6000	6000			5495	4238	3411	2826	2390	2052				
40		2.5	34.4	3000	3000						2945	2500					
		2.5	18.9	6000	6000			5622	4339	3495	2897	2452					
35		2.5	33.5	3000	3000						2850						
		2.5	18.4	6000	6000			5452	4204	3383	2802						
30		2.5	30	3000	3000												
		2.5	18.4	6000	6000			5477	4225	3400							

## 配重配置 Counter-jib Ballast

配重配置 Counter-jib ballast		2730-2120-1170			
 (m)	 (m)	 (kg)	PZ2730	PZ2120	PZ1170
60	12.5	15720	3	3	1
55	12.5	14550	3	3	0
50	12.5	12990	2	3	1
45	12.5	11820	2	3	0
40	12.5	10870	2	2	1
35	12.5	8750	2	1	1
30	12.5	8140	1	2	1

## 传动机构 Mechanisms

传动机构 Mechanisms	图例 Legend	型号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率(kW) Power	
起升 Hoisting		24QT15A		0-8.5	3	400 >400*	24/24/5.4
				0-40	3		
				0-80	1.5		
				0-4.2	6		
				0-20	6		
				0-40	3		
变幅 Trolleying		33BDZ60	26/50m/min			2.2/3.3	
回转 Slewing		37HR100	0-0.6r/min			2×3.7	
行走 Travelling		RT	0-24m/min			2×5.2	
电源 Main Supply					~380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)						34.7kW	

\* 如需其他配置，请与我们联系。 For other configuration, consult us please.

此样本所列技术参数不受法律约束，具体请详见相应产品说明书。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.