

Qingzhou Hongyuan Vehicles Co.,Ltd.

NO.1 Bali Road,Qingzhou City,Shandong Province ,262500,China.

www.hongyuanmachine.com



HONGYUAN

SELF LOADING CONCRETE MIXER HY-350

DELIVERY TIME: 15 working days after deposit

PAYMENT TERM:30% T/T payment in advance ,balance before shipment

PACKING STYLE:Nude package ,1 unit in 40HQ container

WARRANTY:1 year From the date customer receive the machine

PRICE VALIDITY : 20 days

| Model | Desc | Qty | EXW (RMB) | |
|---|---|-----|-----------|--|
| HY350 mobile self loading concrete mixer with 270°rotation function | Yuchai 85KW engine Concrete output productivity 3.5 cbm With 270°rotation function double reverse camera . Automatic weighting system with printer 4 batches per hour. Hydraulic Torque Converter Transmission, 4 wheel drive ,articulated style. 16/70-20 tyres . Turbo-Wom rotation . automatic upper water system ,with pump and pipes. warning light, back sound, radio, fan, hand brake, extinguisher, window hammer, Easy damaged spare parts ,tool box. | 1 | | |
| Total | | | | |



Specification and Photo

Qingzhou Hongyuan Vehicles Co.,Ltd.

NO.1 Bali Road,Qingzhou City,Shandong Province ,262500,China.

www.hongyuanmachine.com



HONGYUAN

| Name | Item | Spec | | |
|--------------------|-------------------------------|-------------------|------------------|--|
| Overall machine | Net weight | 8100kg | | |
| | Overall size | 7600*2360*4380mm | | |
| | Transmission | Full Hydraulic | | |
| | | 4WD | | |
| | Brake | Air brake | | |
| | Chassis | Off-road | | |
| | Wheelbase | 2850mm | | |
| | Loader bucket | Capacity | 0.5cbm | |
| | | Control | Hydraulic | |
| | Tilt Angle | 30% | | |
| | Speed | High speed | 0-25KM/H(40KM/H) | |
| | | Low speed | 0-9KM/H | |
| Min turning radius | 6.5m/r | | | |
| Tyre Model | 16/70-20 | | | |
| Engine | Type | Yuchai | | |
| | Rated Power/RPM | 85KW/2600RPM | | |
| | Max Torque/RPM | 460N.W/1400RPM | | |
| | Cylinder | 4 | | |
| | Starter | Electric | | |
| | Cooling type | Water Cooling | | |
| Maxing Drum | Drum full capacity | 5.8cbm | | |
| | Drum work capacity | 3.5cbm | | |
| | Bank angle | 16° | | |
| | Self rotation angle | 270° | | |
| | Rotation speed | 21R/min | | |
| Chute | Swing Angle | ≥60° | | |
| | Angle control | Hydraulic | | |
| | Size | 138CM | | |
| Loader | Weight model | Computer control | | |
| | | Concrete standard | C15.C20.C25.C30 | |
| | Accuracy | Cement | ≤ ± 2%/time | |
| | | Relative error | ≤ ± 3%/time | |
| | | Water | ≤ ± 1%/time | |
| | | Additive | ≤ ± 1%/time | |
| Admixture | ≤ ± 2%/time | | | |
| Loader control | Hydraulic control 4 way stick | | | |





Qingzhou Hongyuan Vehicles Co.,Ltd.

NO.1 Bali Road,Qingzhou City,Shandong Province ,262500,China.

www.hongyuanmachine.com



HONGYUAN

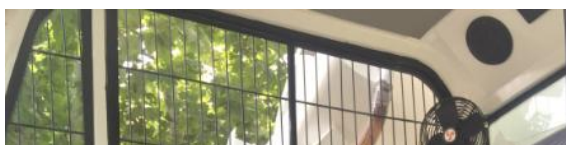

Qingzhou Hongyuan Vehicles Co.,Ltd.

NO.1 Bali Road,Qingzhou City,Shandong Province ,262500,China.

www.hongyuanmachine.com



HONGYUAN

