

机械产品手册


**Mechanical Attachments
Catalogue**

龙合智能装备制造有限公司

Longhe Intelligent Equipment Manufacturing Co., Ltd

2018





公司简介



位于中国福建龙岩市经济技术开发区（国家级高新技术园区），系一家集自主研发、高端制造、营销服务为一体的现代化企业。公司主营业务包括叉车属具、工程机械及农业机械属具、物料转运车、工业搬运机器人、物料搬运装车系统的销售\租赁及为客户提供物料搬运系统解决方案。

公司设有龙合智能技术研发中心和龙合智能长沙研发中心拥有专业技术研发人员45人，其中博士1人、硕士5人、中级及以上职称技术18人，拥有已经授权的专利93项目（其中发明专利9项）。公司设有国际、国内及智能设备专业的销售团队在英国、新加坡、广东设有全资子公司；产品远销英国、德国、瑞典、美国澳大利亚、新加坡等70多个国家和地区。拥有国际客户170多家、国内经销商40多家，并与英国JCB、日本三菱、林德（中国）、凯傲宝骊、浙江吉鑫祥、杭州叉车、徐工机械等国内叉车和工程机械主机厂建立了配套合作关系。

公司通过了两化融合管理体系认证、知识产权管理体系认证、ISO9001质量管理体系认证、ISO140001环境管理体系认证、OHSAS18001职业健康安全管理体系认证和ISO3834-2国际焊接质量管理体系认证。

公司是国家高新技术企业、国家两化融合试点单位、全国工业车辆标准化技术委员会属具工作组召集单位、中国工业示范单位、福建省科技型企业、福建省“专精特新”中小企业（特色化）、福建省知识产权优势企业、龙岩市科技小巨人龙头企业被龙岩市政府授予“第三届龙岩市政府质量奖”



Company Profile



Longhe Intelligent Equipment Manufacturing Co, Ltd is located in China Economic and Technological Development Zone of Longyan City, Fujian Province (National new and high-tech zone). It is the modern international enterprise integrating designing, manufacturing, sales and service. The company's main business includes forklift attachments, construction machinery attachments, agricultural attachments, E-Frame Trailer, industrial handling robots, material handling and loading systems, and providing customers with material handling system solutions.

The company has Longhe Intelligent Technology R&D Center and Longhe Intelligent (Changsha)R&D Center. It has 45 professional and technical R&D personnels, including 1 doctor, 5 masters, 18 midlevel and above titles, and 93 national patents which includes 9 invention patents.

The company has sales teams specialized in international, domestic and intelligent equipments major. There are wholly-owned subsidiaries in the UK, Singapore and Guangdong. We have more than 40 national dealers and 170 international customers from over 70 countries such as Germany, Sweden, USA, Australia, Singapore, etc. We have established partnership with domestic forklift and construction machinery manufacturers at home and abroad such as JCB UK, Linde(China), Mitsubishi Japan, Kion Baoli, Hangcha , Zhejiang Goodsense, Xuzhou Construction Machinery etc.

The company earned Integration of Information and Industrialization, national patent, ISO9001, ISO140001, OHSAS18001, ISO3834-2 certifications. Also we can supply CE, TUV and SGS certifications for many products.

The company is a national high-tech enterprise, a pilot enterprise of national Integration of Information and Industrialization. We are attachments team convenor for National Technial Committee of Industrial Vehicle Standardization. The company has been awarded Chinese Industrial Demonstration enterprise, Science and Technology Enterprise in Fujian Province Fujian "Specialization, refinement, peculiarity, novelty" small and mediumsized Enterprises, Intellectual Property Advantage Enterprise of Fujian Province, Longyan Science and Technology Leading Enterprise and Longyan Municipal Government awarded "The 3rd Longyan Municipal Government Quality Award".



目录

货叉套Fork Extension	1
起吊臂Crane Jib	2
起吊叉Pallet Hook	7
起吊钩Crane Hook	9
工作平台Working Platform	10
坡道平台Container Ramp	15
串杆Roll Prong	16
货笼Goods Cage	18
举桶器Drum Lifter	23
抱桶器Drum Handler	26
后视镜Rearview Mirror	27
翻箱器Wheelie Bin Tipper	28
液压蹬车桥Hydraulic Dock Leveler	30
转向车Turning Trailer	32
拖车Turning Trailer	33
物料转运车E Frame Trailer	34
液压铲斗Hydraulic Dirt Bucket	36
倾卸体Drop Bottom Bin	37
倾卸体Drop Bottom Bins	38



CONTENTS

重型箱Heavy Duty Crane Bins	39
箱子倾斜体Turning Trailer BTS-10-01	40
货叉延伸器Fork Spreader	41
起重延伸器Forklift Spreader Beam – Light	42
排雪犁Snow Plough	43
混凝土收集箱Concrete Collection Tray	44
起重储运箱Heavy Duty Storage Boxes	45
布袋搬运器Bag Lifter	46
电池搬运器Battery Removal Jib	49
搅拌机Concrete Kibble	50
托盘架 Filling Rack	51
储油盒Oil Spill Bin	52
气瓶车Gas Cylinder Cage	53
弹簧升降平台Spring Lift Table	54
货叉架型钢Carriage Bar	55
货叉 Forklift Forks	56
称重货叉Weighing Forks	57
货叉种类及货叉挂钩类别Fork Spare Parts	58



货叉套

Fork Extension

- 货叉套以最简单的方式对货叉的长度进行延伸，可延伸至货叉长度的1.6倍
- 可根据客户要求设计其它尺寸
- 表面处理：喷漆或镀锌
- The Fork Extension is the best choice to extend the length of fork to the max of 1.6 times length fork
- Other sizes are available according to customers' requirements
- Surface treatment: painted or galvanized finish



型号 Type	长度 Length (mm)	最大货叉尺寸 Max.Fork Section (mm)	净重(Kg/付) Unit Weight (kg/pair)	承载量 Capacity (kg/mm LC)
FE1-16	1600	100×45	50.0	3000/600
FE1-18	1800		56.0	
FE1-21	2100		66.0	
FE1-24	2400		75.0	
FE2-16	1600	130×50	59.0	4500/600
FE2-18	1800		66.0	
FE2-21	2100		77.0	
FE2-24	2400		88.0	
FE3-16	1600	150×55	91.0	6500/600
FE3-18	1800		102.0	
FE3-21	2100		119.0	
FE3-24	2400		136.0	
FE3-30	3000	165×65	170.0	8500/600
FE4-18	1800		112.0	
FE4-21	2100		132.0	
FE4-24	2400		152.0	
FE4-30	3000		186.0	






起吊臂

Crane Jib

- 体积小，适用于较小空间
- 安装便捷，主要应用丁只有叉车却没有行车、但又需要进行货物吊装の場合
- 设计成伸缩臂，吊装长度更灵活
- 承载能力：2500kg、4500kg、4750kg、9500kg
- 表面处理：喷漆或镀锌
- Small insize and little space taking
- Easy installation,mainly used for lifting goods in the situation without travelling crane and only forklift available
- Telescopic boom design makes flexible lifting length
- Capacity: 2500kg,4500kg,4750kg,9500kg
- Surface treatment: painted or galvanized finish

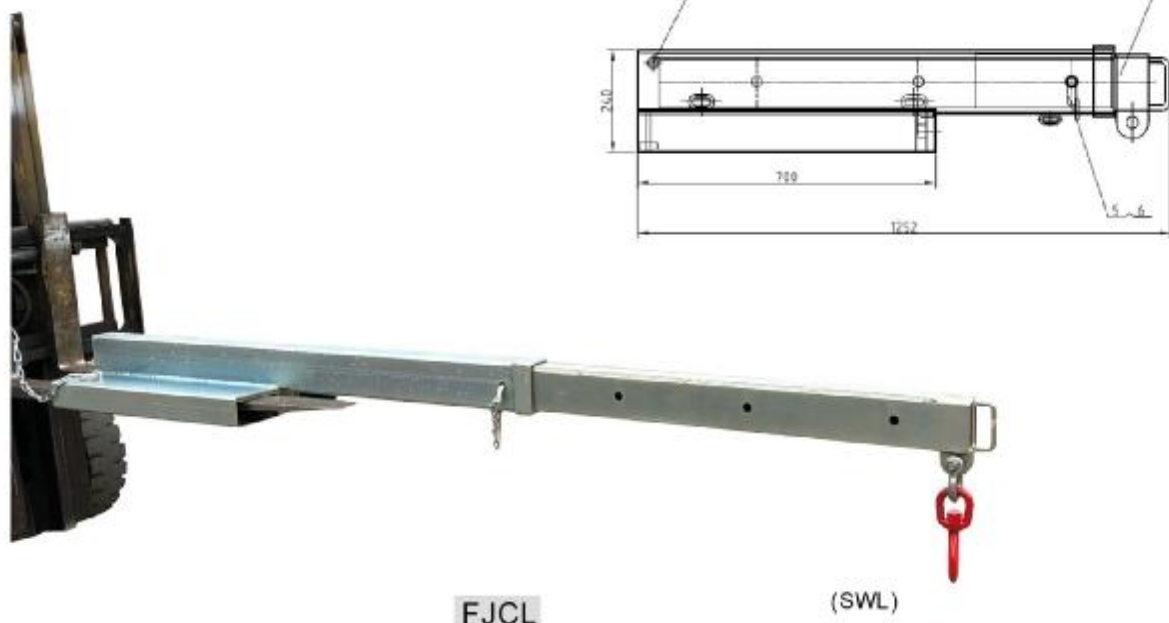

型号 Type	总长 Overall Length Retracted/Extended (m)	载荷 Max.SWL (kg)	货叉套尺寸 ForkPocket Size (mm)	单重 Unit Weight (kg)	每个点承载 SafeWorkingLoad(SWL)PerPosition (kg/mm)							
FJCL25	2.1-3.5	2500	185X65	130	2500/950	2500/1410	1900/1870	1650/2000	1250/2380	650/2760	380/3140	240/3520
FJCL45	2-3.5	4500	185X65	140	4500/870	1300/1945	750/2325	560/2705	380/3085	200/3465		
FJCL50	2.1-3.5	4750	185X75	170	4750/935	4275/1395	3800/1855	3300/2000	2500/2380	1300/2760	760/3140	480/3520
FJCL100	2.19-3.56	9500	230X110	515	9500/920	8550/1380	7600/1805	6600/2045	5000/2425	2600/2805	1520/3185	960/3565

起吊臂

Crane Jib

- 体积小，适用于较小空间
- 安装便捷，主要应用丁只有叉车却没有行车、但又需
要进行货物吊装的情况
- 设计成伸缩臂，吊装长度更灵活
- 承载能力：2500kg、4500kg、4750kg
- 表面处理：喷漆或镀锌
- Small insize and little space taking
- Easy installation,mainly used for lifting goods
in the situation without travelling crane and only
forklift available
- Telescopic boom design makes flexible lifting length
- Capacity: 2500kg,4500kg,4750kg
- Surface treatment: painted or galvanized finish



TJCL

型号 Type	载荷 Max.SWL (kg)	货叉套尺寸 Fork Pocket Size (mm)	单重 UnitWeight (kg)	每个点承载 SafeWorkingLoad(SWL)PerPosition (kg/mm)							
TJCS25	2500	185X65	130	2500/825	1800/1125	1200/1260	900/1640	750/2020			
TJCL25	2500	185X65	180	2500/1005	2500/1465	1900/1925	1650/2060	1250/2440	650/2820	380/3200	240/3580
TJCL45	4500	185X65	190	4500/770	1100/2010	630/2390	470/2770	300/3150	150/3530		
TJCL50	4750	185X65	250	4750/1000	4275/1460	3800/1920	3300/2070	2500/2450	1300/2830	760/3210	480/3590



起吊臂 Crane Jib

- 运用广泛，安装简单，提供合金卸扣和安全旋转吊钩
- 最大工作荷载7500kg
- 净重：390kg
- 叉套尺寸（mm）：230 x 110
- 表面处理：喷漆或镀锌
- Widely used, easily installed, supply with alloy shackle
- Working load limit (WLL) 7500kg Max
- Net weight: 390kg
- Pocket size: 230 x 110mm
- Surface treatment: painted or galvanized finish



FJA750

每个位置的工作荷载限制 (WLL) Working Load Limit (WLL) Per Position				
内壁位置 Position	1	2	3	4
延伸长度 Extension (mm)	1275	1455	1920	2390
工作荷载限制 WLL (kg)	7500	7500	7500	7500

起吊臂

Crane Jib

- 运用广泛，安装简单，提供合金卸扣和安全旋转吊钩
- 最大工作荷载:3500kg
- 净重：200kg
- 挂装方式：3级
- 表面处理：喷漆
- Widely used, easily installed, supply with alloy shackle
- Working load limit (WLL) : 3500kg Max
- Net weight: 200kg
- Carriage mounted: III
- Surface treatment: painted



QDB35F-C001-1500


每个位置的工作荷载限制 (WLL) Working Load Limit (WLL) Per Position					
内壁位置 Position	1	2	3	4	5
延伸长度 Extension (mm)	700	900	1100	1300	1450
工作荷载限制 WLL (kg)	3500	3000	2500	1900	1500



起吊叉

Pallet Hook PHA

- PHA起吊叉是一种可以自动调节重心的起吊装置
- 广泛应用于行车、起重机或其他一些起吊设备
- 内部采用一个大弹簧结构，在使用过程中能自动使货叉处于水平位置，更好的保护处于移动状态的物品
- 货叉间距可以调节
- 表面处理：喷漆或镀锌
- The Pallet Hook PHA is a kind of lifting equipment with auto adjustment for center of gravity
- Widely used by crane and other lifting equipments
- Enclosed big spring mechanism can automatically maintain the forks with horizontal balance when being used, better protecting the moving cargoes
- Adjustable tine width
- Surface treatment: painted or galvanized finish

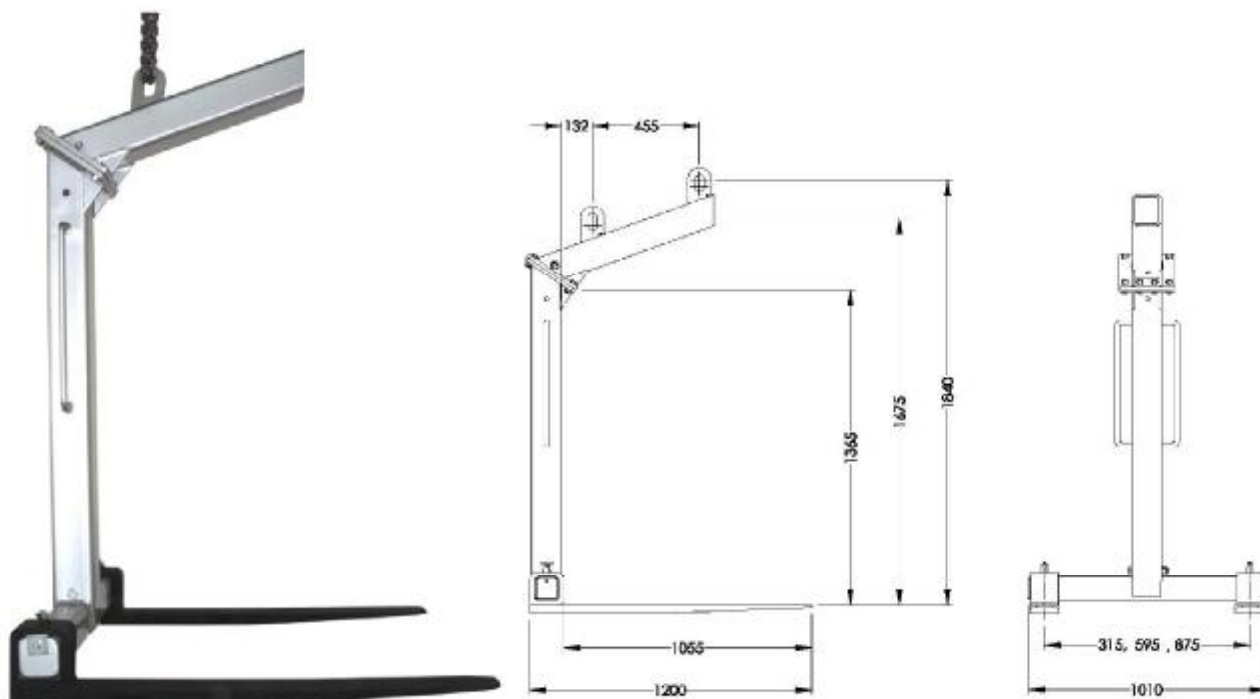


型号 Type	承载量 Capacity (kg)	货叉尺寸 Fork Size (mm)	长×宽×高 L×W×H(mm)	净重 Unit Weight (kg)
PHA2000	2000	100×40×1200	1200×1010×1930	196.0

起吊叉

Pallet Hook PHD

- PHD起吊叉是一种主体高度和货叉间距都可以调节的产品
- 广泛应用丁行车、起重机或其他一些起吊设备，特别适用丁运输和建筑行业
- 通过移动吊环位置来调整整体的平衡状态
- 有两种不同承载量产品供选择
- 表面处理：喷漆或镀锌
- Both the body height and space between forks of the PHD pallet hook can be adjusted
- Widely used by crane or other lifting equipments, especially suitable for transportation and construction industries
- Adjusting lifting ring to keep the overall balance
- Two options with different loading capacities are available
- Surface treatment: painted or galvanized finish

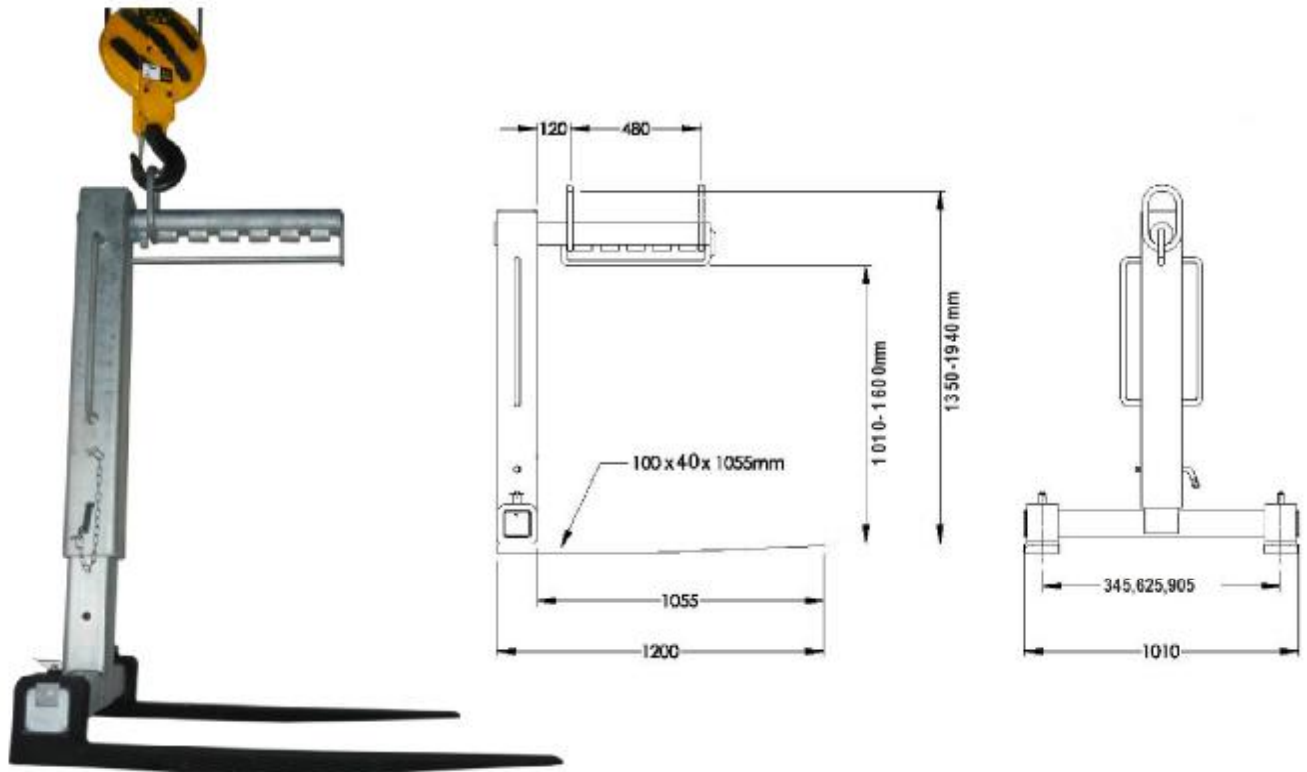


型号 Type	承载量 Capacity (kg)	货叉尺寸 Fork Size (mm)	长x宽x高 L×W×H (mm)	净重 Unit Weight (kg)
PHD2200	2200	100×40×1200	1200×1010×1350	215.0

起吊钩

Crane Hook CLC1500

- 应用于单叉刀上，并带有自紧功能
- 配有安全旋转吊钩和合金卸扣
- 表面处理：镀锌
- Mounted on single fork with self-fastened function
- Supplied with swivel safety hook and alloy shackle
- Surface treatment: galvanized finish

型号 Type	A(mm)	B(mm)	C(mm)	净重 Unit Weight (kg)	承载量 Capacity (kg)
CLC1500	575	180	80	24.0	1500

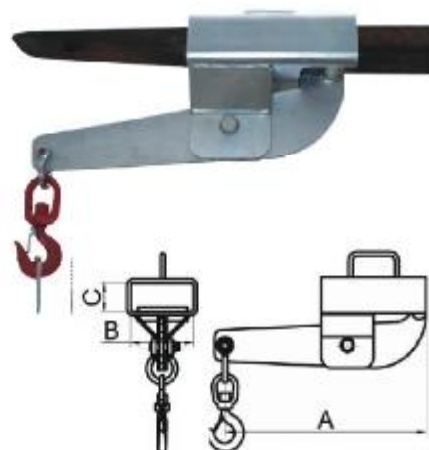

起吊钩

Crane Hook CLC3000

- 应用于双叉刀上，并带有自紧功能，内壁可延伸
- 配有安全旋转吊钩和合金卸扣
- 表面处理：镀锌
- Mounted on dual forks with self-fastened function and extendable intine
- Supplied with swivel safety hook and alloy shackle
- Surface treatment: galvanized finish

型号 Type	A(mm)	B(mm)	C(mm)	净重 Unit Weight(kg)
CLC3000	360	180	80	77.0
内臂位置 Position	吊臂长度 Extension(mm)		承载量 Capacity(kg)	
1	840		3000	
2	1200		2200	
3	1600		1500	



工作平台

Working Platform WB1010


- 能够确保高空作业的安全性和舒适性
- 内嵌弹簧式开启门，装有安全门扣，可防止门意外开启，确保作业人员安全
- 防滑底板，底板上有排水孔
- 安全工作载荷：250kg
- 可折叠存放，节约空间，便于运输
- 折叠后尺寸:1230x1150x200mm
- 可选配脚轮、工具箱，操作更灵活，移动更方便
- 表面处理：镀锌
- Suitable for working at height, ensure secure, reliable and comfortable
- Self-closing gate with shackle is supplied to avoid its accidental open and ensure safety of operators
- Non-slip bottom-board with drain holes
- Safe working load: 250kg
- Foldable for easy storage and transportation
- Flatpack in smaller size: 1230x1150x200mm
- Optional casters and tool box, flexible operation and fast removal
- Surface treatment: galvanized finish




型号 Type	外框尺寸 Outer Frame Size (mm)	叉套规格 Fork Pocket Size (mm)	净重 Unit Weight (kg)
WB1010B-01	1156x1226x2070	150x55	129
WB1010E-01	1156x1226x2078	150x55	134.21
WB1010EA-01	1156x1226x2278	150x55	153.45
WB1010H-01	1156x1226x2070	150x55	133.85
WB1010Q-01	1156x1226x2080	150x55	153.52

工作平台 Working Platform WP-F80


- 适用于高空作业，安全可靠
- 网状底盘，简单实用
- 安全工作载荷：170kg
- 最大货叉尺寸：170X45mm
- 外框尺寸：800X1200X1800(H)mm
- 净重：91.0kg
- 可折叠存放，节约空间，便于运输
- 折叠后尺寸：820X1220X220mm
- 可选配脚轮，工具箱等
- 表面处理：喷漆
- Suitable for working at heights, secure and reliable
- With a simple and practical meshed chassis
- Safe working load: 170kg
- The max size of fork pocket: 170x45 mm
- Outer frame size: 800x1200x1800(H)mm
- Unit weight: 91.0kg
- Foldable for easy storage and transportation
- Flatpack size: 820X1220X220mm
- Can be equipped with casters, toolbox, etc.
- Surface treatment: painted finish

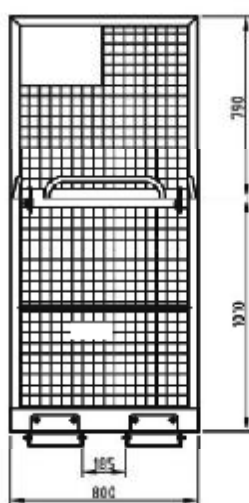

左侧视图
Left side view

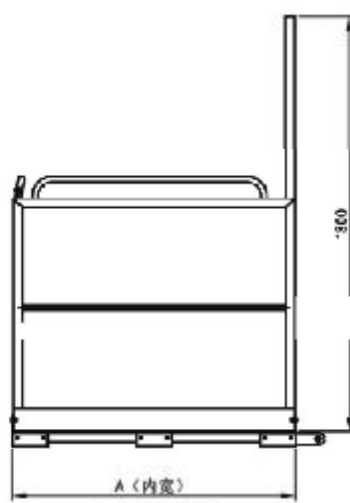

A (内宽)
(Inner Width)
主视图
Front view

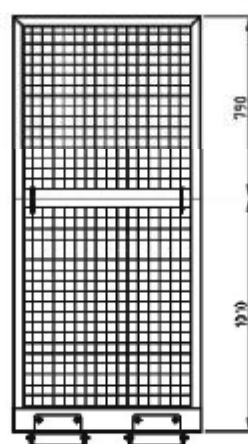


右侧视图
Right side view


工作平台

Working Platform WP-F120


- 适用于高空作业，安全可靠
- 网状底盘，简单实用
- 安全工作载荷：240kg
- 最大货叉尺寸：170x45mm
- 外框尺寸：1200x1200x1800(H)mm
- 净重：110.0kg
- 可折叠存放，节约空间，便于运输
- 折叠后尺寸：1220x1220x220mm
- 可选配脚轮，工具箱等
- 表面处理：喷漆
- Secure, reliable and suitable for working at heights
- With a simple and practical meshed chassis
- Safe working load: 240kg
- Unit weight: 110kg
- Foldable for easy storage and transportation
- Flatpack size: 1220x1220x220mm
- Optional casters and toolbox.
- Surface treatment: painted finish

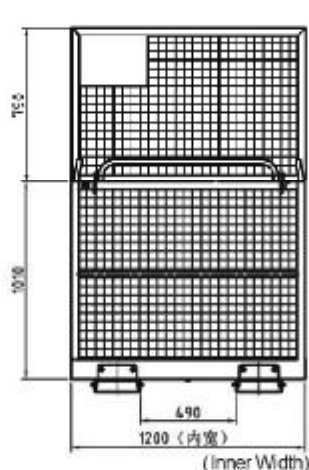

左侧视图
Left side view

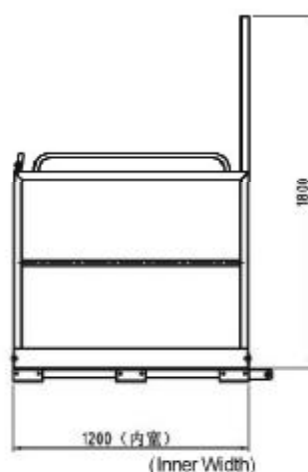

主视图
Front view


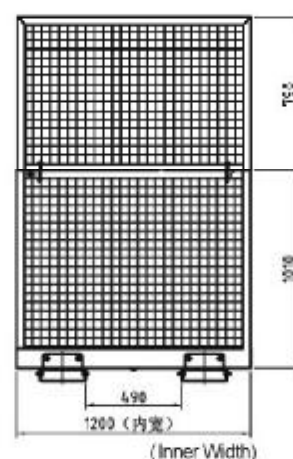


右侧视图
Right side view

大工作平台

Big Working Platform

- 适用于高空作业，安全可靠
- 网状底盘，简单实用
- 安全工作荷载：450kg
- 最大货叉尺寸：180x70mm
- 外框尺寸：1180x1380x2945mm
- 净重：308kg
- 表面处理:喷漆
- Suitable for working at heights, secure and reliable
- With a simple and practical meshed chassis
- Safe working load: 450kg
- The max size of fork pocket: 180x70mm
- Outer frame size: 1180x1380x2945mm
- Unit weight: 308kg
- Surface treatment: painted finish

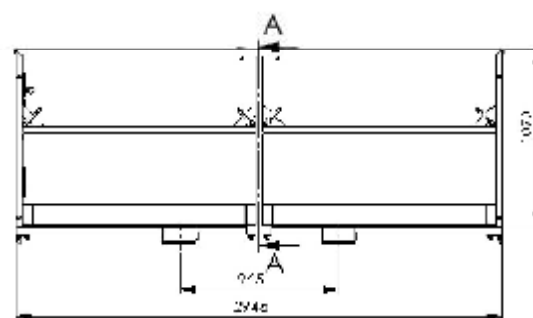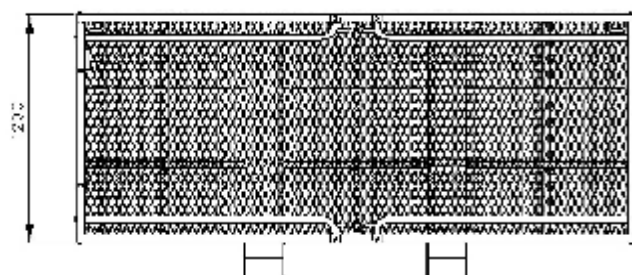

型号 Type	承载量 Safe working load (kg)	最大货叉尺寸 Max ForkSize (mm)	净重 Unit Weight (kg)	外宽尺寸 Outer Frame Size (mm)
3614-000000	450	180x70	308	1180x1380x2945

坡道平台

Container Ramp

- 坡道平台是运用最广泛的一种坡道平台
- 广泛应用于从地面桥接到标准货柜中，同样也可用于在码头装卸等需要桥接的场合
- 表面处理：喷漆
- Is one of the most widely used container ramp
- It is extensively used as a connecting bridge between the ground and the standard containers or for dock stevedoring and similar occasions
- Surface treatment: painted finish

型号 Type	宽x长 WidthxLength (mm)	载荷 SWL (kg)	货叉套中心距 Fork Pocket Centres (mm)	最大货叉尺寸 Max.Fork Size (mm)	单重 Unit Weight (kg)
CRN65	2200x2000	6500kg	775	160x60	304
CRSN8	2390x1800	8000kg	518	160x60	400
CRLN8	2300x3000	8000kg	718	160x70	688
FCR65	2000x1380	6500kg	740	160x50	200



CRLN8



CRN65

悬挂式串杆

Carriage Mounted Roll Prong RPC

- 该产品可搬运带有中心孔的货物，如地毯卷、电缆卷、轮胎等
- 安装类型：悬挂式
- 主体材料：高强度钢
- 长度：现场工况要求
- 表面处理：喷漆
- This product is designed for carrying cargoes with a center hole, such as carpet roll, cable roll and tire etc.
- Installation method: Carriage mounted
- Made of high-strength steel
- Upon customer's load condition
- Surface treatment: painted finish



型号 Type	串杆直径 Prong Diameter (mm)	串杆长度 Prong Length (mm)	安全工作荷载 SWL/LC	净重 Unit Weight (Kg)	安装等级 Mounting Class
RPC-QR2-40-1200	40	1200	200kg/600mm	63	2
RPC-QR2-50-1800	50	1800	250kg/900mm	79	2
RPC-QR2-60-2800	60	2800	340kg/1400mm	113	2
RPC-QR2-70-2800	70	2800	510kg/1400mm	135	2
RPC-QR2-80-2800	80	2800	850kg/1400mm	166	2
RPC-QR3-70-2800	70	2800	510kg/1400mm	190	3
RPC-QR3-80-2800	80	2800	850kg/1400mm	220	3
RPC-QR3-100-2800	100	2800	1700kg/1400mm	282	3



套入式串杆

Slip-On Roll Prong RPS

- 该产品可搬运带有中心孔的货物，如地毯卷、电缆卷、轮胎等
- 安装类型：套入式
- 主体材料：高强度钢
- 长度：现场工况要求
- 表面处理：喷漆
- This product is designed for carrying cargoes with a center hole, such as carpet roll, cable roll and tire etc.
- Installation method: slip-on
- Body material: high-strength steel
- Upon customer's load condition
- Surface treatment: painted finish



型号 Type	串杆直径 Prong Diameter (mm)	串杆长度 Prong Length (mm)	承载量 Capacity (kg)	净重 Unit Weight (kg)
RPS60-2800	60	2800	1200/500	140.0
RPS70-2800	70	2800	2000/500	165.0
RPS80-2800	80	2800	3000/500	200.0
RPS100-2800	100	2800	5800/500	328.0

托盘笼

Goods Cage PCM-01



- 该产品是一个常用尺寸的托盘笼，用于仓库和其他一些存储需求，可以迅速的进行安装和拆卸，从而节省空间和提高运输效率，可配合叉车、电瓶车、堆高车等使用
- 前部有一个折叠门，后部有一个活页门，方便装卸
- 可根据使用要求选择是否增配底部镀锌板
- 满载堆叠2层
- 安全工作载荷：1000kg（需载荷分布均匀）
- 容量：1m³
- 外框尺寸：1160x1160x990（H）mm
- 网格间距：75x50mm
- 净重：65.0kg
- 表面处理：镀锌
- This product, which is of usual size, used to meet storing demands in warehouses or other occasions. It can be installed or dismantled quickly, saving space and improving transportation efficiency. It can also be used with forklift, pallet trolley stacker ect.
- The cage is fitted with a folding gate in the front and hinged one at the rear, which is convenient for loading or unloading
- Extra bottom of galvanized sheet is optional according to customers' requirements
- Can be stacked up to 2 high when loaded
- Safe working load: 1000kg (equally distributed)
- Volume: 1m³
- Outer frame size: 1160x1160x990(H)mm
Mesh spacing: 75x50mm
- Unit weight: 65.0kg
- Surface treatment: galvanized finish



储存笼

Storing Cage PCT-02


- 本产品属于多功能可堆叠储存笼，用于仓储、转运散装货物或打包好的货物
- 配有一个折叠门和一个活页门，方便装卸，可折叠存放，节约空间，便于运输
- 使用在标准木托盘上（可选配）
- 安全工作载荷：2000kg（需载荷分布均匀）
- 容量：1m³
- 外框尺寸：1154x1154x876（H）mm
- 网格间距：75x50mm
- 净重：含硬木托盘75.0kg，不含硬木托盘40.0kg
- 表面处理：镀锌
- 满载堆叠2层
- It is a versatile and stackable storing cage, designed for storing or carrying bulk or packed goods
- The equipped folding and hinged gates make it convenient for loading and unloading; easy storage for its disassembly, saving space and also free to transport.
- Used for standard hardwood pallet (optional)
- Safe working load: 2000kg (evenly distributed)
- Volume: 1m³
- Outer frame size: 1154x1154x876(H)mm
- Mesh spacing: 75x50mm
- Unit weight: 75.0kg (with hardwood pallet), 40.0kg (without hardwood pallet)
- Surface treatment: galvanized finish
- Can be stacked up to 2 high when loaded

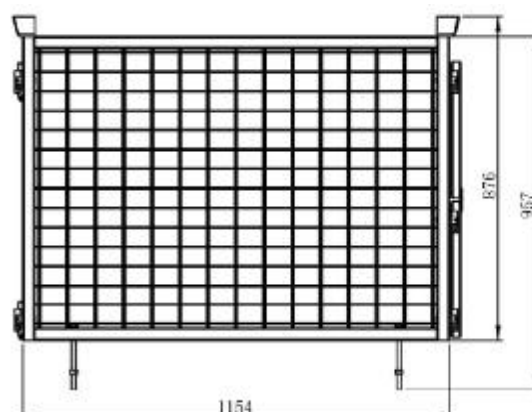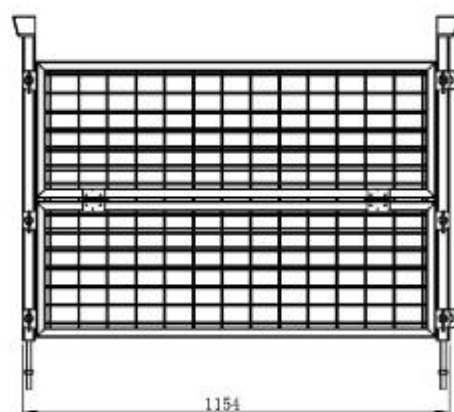

吊笼

Goods Cage CSPN



- 吊笼通过叉车或起吊机等，可安全地搬运散货或打包好的货物
- 全开式的门，允许最大宽度为1200mm的方形托盘进入。可通过行车进行堆叠，以节省更多的存储空间，当空载时最多可以堆3层，载满时最多可以堆2层
- 4点式吊装
- 外框尺寸：1350x1350x1153(H)mm
- 网格间距：50x50mm
- 起吊承载量：1000kg
- 净重：160.0kg
- 容量：2.3m³
- 表面处理：喷漆或镀锌
- This Goods Cage CSPN is able to safely carry bulk or packed goods by using forklift or crane
- The wide-open gate allows the entrance of square pallet with the max width of 1200mm. The storing space can be further enlarged when stacked by bridge crane to save space. This cage can be stacked up to three level when empty and two level when full loaded
- 4 point lift
- Outer frame size: 1350x1350x1153(H)mm
- Mesh spacing: 50x50mm
- Lift capacity: 1000kg
- Unit weight: 160.0kg
- Volumn: 2.3 m³
- Surface treatment: painted or galvanized finish

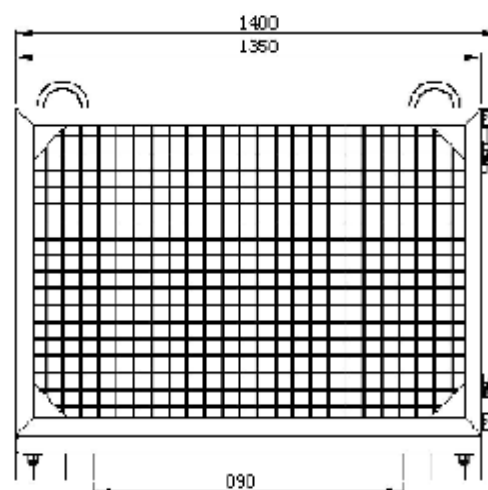

货笼

Brick Cage BSN6

- 该产品是通过起吊机来吊运砖块或其他类似的一些产品
- 适用于1200mm的方形托盘
- 4点式吊装
- 外框尺寸：1340x1340x1720(H)mm
- 网格间距：75x75mm
- 折叠尺寸：1750x1370x475mm
- 起吊承载为：2000kg
- 净重：255.0kg
- 容量：1.5m³
- 最大托盘高度：1500mm
- 货笼货叉可拆卸
- 表面处理：镀锌
- The Brick Cage BSN6 is designed to convey pallets of bricks or similar materials via crane
- Suitable for 1200mm square pallets
- 4 points lift
- Outer frame size: 1340x1340x1720(H)mm
- Mesh spacing: 75x75mm
- Flatpacksize: 1750x1370x475mm
- Lift capacity: 2000kg
- Unit Weight: 255.0kg
- Volumn: 1.5 m³
- The maximum height of pallet: 1500mm
- Detachable and foldable
- Surface treatment: galvanized finish

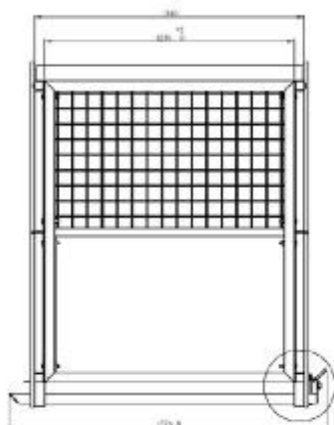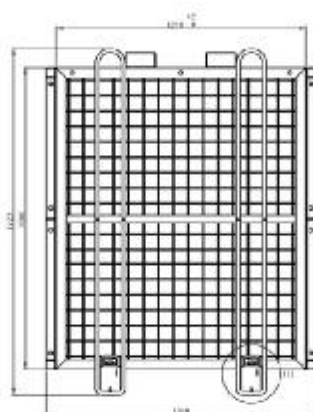



举桶器

Drum Lifter DH

- 该产品配合叉车使用可安全高效地搬运和堆放各类圆桶，节省仓储空间
- 具有很大的夹紧力，构造坚固，距离可调节
- 有单桶和双桶可供选择
- 表面处理：喷漆或镀锌
- Used with forklift to move or stack oil drums with high efficiency, saving storing space.
- Superior clamping force, solid construction and adjustable distance
- Single or double drums are optional
- Surface treatment: painted or galvanized finish




型号 Type	承载量 Capacity (kg)	最大货叉尺寸 Max.Fork Size (mm)	货叉套中心间距 Fork Pocket Centres (mm)	净重 Unit Weight (kg)	桶的数量 No. of Drums
DH1	700	180×80	250	115.0	1
DH2	1200	180×80	600	138.0	2

举桶器

Drum Lifter BGN

- 该产品配合叉车使用可安全高效地搬运和堆放油桶，节省仓储空间
- 该产品具有很大的夹紧力
- 适用于举起200L的标准桶
- 表面处理：喷漆或镀锌
- Used on forklift to move or stack oil drums with high efficiency, saving storing space
- Superior clamping force
- Suitable for 200L standard drums
- Surface treatment: painted or galvanized finish

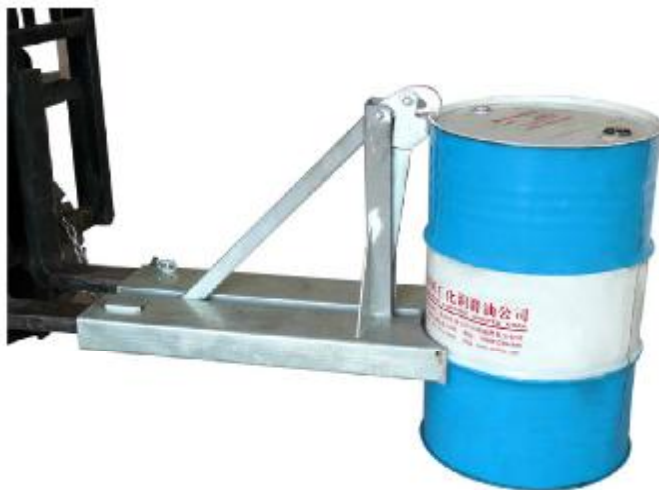

BGN1



BGN2

型号 Type	承载量 Capacity (kg)	最大货叉尺寸 Max. Fork Size (mm)	货叉套中心间距 Fork Pocket Centres (mm)	净重 Unit Weight (kg)	桶的数量 No. of Drums
BGN1	1000	180×60	250	68.0	1
BGN2	1500	180×60	600	96.0	2



举桶器

Drum Lifter SD

- 该产品配合叉车一起使用可安全高效地搬运或堆放油桶各类同桶，节省存储空间。
- 具有很大的夹紧力，坚固的结构和距离可以调节
- 有单桶和双桶可供选择
- 表面处理：涂漆或镀锌
- Used with forklift to move or stack oil drums with high efficiency, saving storing space.
- Superior clamping force, solid construction and adjustable distance
- Single or double drums are optional
- Surface treatment: painted or galvanized finish



型号 Type	承载量 Capacity (kg)	最大货叉尺寸 Max.Fork Size (mm)	货叉套内间距 Fork Forket Inner Edge Distance (mm)	净重 Unit Weight (kg)	桶的数量 No. of Drums
BGNB1C-001	500	160×65	400	122	1
BGNB2C-001	750	160×65	400	180	2
BGNC2C-001	1000	160×65	400	182	2
BGNB2C-002	750	160×65	400	168	2
BGNC2C-002	1000	160×65	400	192	2

抱桶器

Drum Handler SDLC

- 该产品使用简单、方便，并且非常安全
- 针对200L标准金属桶进行设计
- 应用于叉车或堆高车上
- 有单桶和双桶可供选择
- 表面处理：喷漆或镀锌
- Simple operation, convenient and safe
- Designed for 200L standard drums
- Used on forklift or stacker
- Single or double drums are optional
- Surface treatment: painted or galvanized finish



SDLC1



SDLC2

型号 Type	承载量 Capacity (kg)	净重 Unit Weight (kg)	桶的数量 No. of Drums	桶的直径 Diameter (mm)
SDLC1	500	96.0	1	Φ 572
SDLC2	1000	131.0	2	Φ 572

旋转抱桶器

Drum Rotator DR400MF

- 采用双门式结构，方便安装、使用简单、方便，并且非常安全
- 搬运200L的标准金属桶及倾翻工作，可做到360°旋转货物
- 应用于叉车或堆高车上
- 承载量：400kg
- 净重：112.0kg
- 最大货叉套尺寸：180×60mm
- 表面处理：喷漆或镀锌
- Dual gates structure,easy installation,simple operation, convenient and safe
- Designed for lifting and rotating 200L drums in 360 degree
- Used by forklift or stacker
- Safe working load: 400kg
- Unit weight: 112.0kg
- Max size of fork pocket: 180x60 mm
- Surface treatment: painted or galvanized finish



后视镜

Rearview Mirror

- 180度全景后视镜
- 材料：抗冲击ABC塑料
- 光学性能佳，视野清晰
- 可根据客户要求制作不同的支架
- 适合室内和室外使用
- 符合美国SAE标准
- 180 degrees panoramic rearview mirror
- Material: impact-resistant ABS plastic
- Good optical property, clear vision
- Different brackets are available according to customers'requirements
- Suitable for both indoor and outdoor uses
- In accordance with the American SAE Standard



翻箱器

Bin Tipper

翻箱器是专为在制造业，农业和新鲜农产品行业常用的快速，高效和安全的料箱排空而设计的。一旦叉车将箱子拖运到指定区域，它就可以倾倒箱内的物品，如水果和杂物等。该产品还包含一个良好的观察口，因此使用方便，安全可靠并且节省人力资源

- 一套油路控制系统
- 最大装载量：1000kg
- 手货叉车最大尺寸：125×45×1000mm
- 表面处理：喷漆

The bin tipper is designed for the fast, efficient and safe emptying of bins as commonly used in the manufacturing, agriculture, and fresh produce industries. Once a forklift truck hauls boxes to the assigned area, it works to dump stuff contained in the boxes, such as fruit and sundries, etc. The product also includes a good viewport, thus makes it convenient, safe and reliable to use and saving human resources

- Hydraulic circuit control system
- The maximum loading capacity: 1000kg
- The maximum size of forklift for arm: 125×45×1000mm
- Surface treatment: painted finished



型号 Type	箱子尺寸 Box size	承载 SWL (kg)	最大货叉尺寸 Max. Fork Size (mm)	货叉套中心 Fork Pocket Centers (mm)	载荷中心 Load Centre (mm)	单重 Unit Weight (kg)
FXQA-000000	1180Lx700-900H	1000	125x45	600	960	180
FXQB-000000	1000Lx700-730H	1000	125x45	600	950	161

翻箱器

Wheelie Bin Tipper

- NWB-T1型号转轮箱是针对翻转卸空240公升标准型塑料箱子设计的。箱子通过安全链条和到挡货架固定，可在工作场所上升箱子进行翻转卸空，操作者无需离开座位也能简单安全的操作翻转
- NWB-T2型号转轮箱是针对翻转卸空1个或者2个240公升标准型塑料箱子设计的。类似于NWB-T1
- The type NWB-T1 Wheelie Bin Tipper is designed for emptying a standard 240 litre plastic bin. The bin is secured in the cradle and by a safety chain, allowing it to be lifted or transported about the workplace, and emptied. The tipping operation is simple and safe, with the operator never having to leave his seat.
- The type NWB-T2 Wheelie Bin Tipper is designed for emptying 1 or 2 standard 240 litre plastic bins. Similar to NWB-T1



NWB-T2



NWB-T1



型号 Type	箱数 Number Of Bins	承载 SWL (kg)	最大货叉尺寸 Max.Fork Size (mm)	货叉套中心 Fork Pocket Centers (mm)	载荷中心 Load Centre (mm)	单重 Unit Weight (kg)
NWB-T1	1	500	165x65	340	1200	100
NWB-T2	2	1000	165x65	340	1200	150

液压登车桥

Hydraulic Dock Leveler


- 可调节高度的登车平台作为码头和卡车之间的桥梁，解决了卡车与码头/仓库地板之间的缝隙的问题。
- 开放式流线型铰链设计，增加3倍的焊接位置，从而延长使用寿命
- 连续一体式主板系统增强了甲板前部结构的强度，结实，耐用，容易维修
- 唇板式设计，提高耐用性
- 多种型号可供选择
- 承载：13吨，15吨，18吨
- 使用高度范围：向上可调300mm和向下可调300mm，可根据要求定制高度
- 左右各3片防护板，可自动关闭并打开，以防止人员把脚或者异物伸入登车桥
- 表面处理：喷漆
- Height-adjustable platform used as a bridge between dock and truck,dock Leveler eradicates the problem of bridging the gap between a truck and the dock/warehouse floor.
- Streamlined hinge design increases welding position by 3 times,extending the life of the dock leveler
- Continuous one-piece headboard system intensifies the strength of the deck's front structure,strong, durable and ease of maintenance
- Single lip plate design to improve durability
- Multiple models available
- Capacity: 13T,15T,18T
- Height range: up to 300mm adjustable and 300mm down adjustable,height can be customized upon request
- 3 protective panels on the right and left, which can be automatically closed and opened to prevent personnel from inserting feet or foreign objects into the axle.
- Surface treatment: painted finish





液压登车桥

Hydraulic Dock Leveler

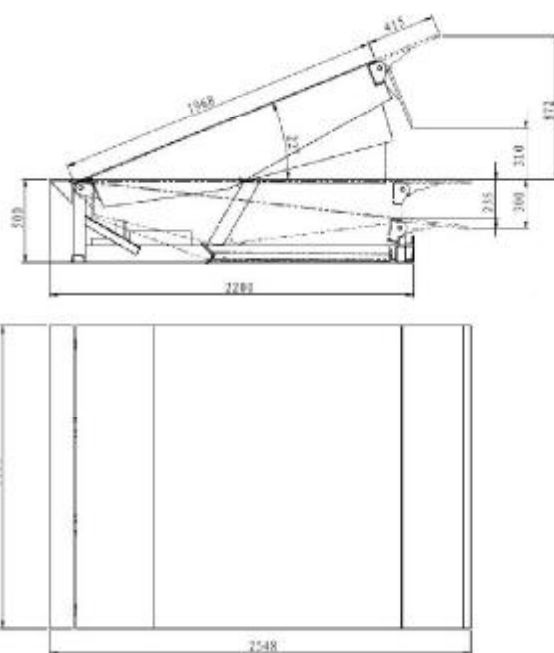

型号 Type	尺寸 Transport Dimensions		唇 Size of receiving deck		承载 Capacity (T)		槽口大小 Size of lip (mm)			
	Ft	mm	Inch	mm	Lbs	Ton	Width(tol)	Length(tol)	Depth (Front)	Depth (Back)
DCT13E-6x8	6x8	1830x2438	16"	415	28,500	13	1860(-0/+10)	2215(-0/+10)	500	490
DCT15F-6x8					33,000	15				
DCT18E-6x8					39,500	18				
DCT13E-6x10	6x10	1830x3048	16"	415	28,500	13	1860(-0/+10)	2825(-0/+10)	600	590
DCT15F-6x10					33,000	15				
DCT18E-6x10					39,500	18				
DCT13F-7x8	7x8	2130x2438	16"	415	28,500	13	2170(-0/+10)	2215(-0/+10)	500	490
DCT15F-7x8					33,000	15				
DCT18E-7x8					39,500	18				
DCT13E-7x10	7x10	2130x3048	16"	415	28,500	13	2170(-0/+10)	2825(-0/+10)	600	590
DCT15F-7x10					33,000	15				
DCT18E-7x10					39,500	18				


转向车

Turning Trailer

- 转运车广泛使用于机场、大型工厂、社区、大型展览中心等场所，主要用于货物、设备等物资的转运，转运车具有强劲的载重能力，稳固扎实的底盘。
- 转向车能实现快速、安全、方便的货物转运，降低人工成本和时间，提高了使用过程中的安全性；
- 适用于3.5T以下物的转运；
- 表面处理：喷漆（按销售订单处理）
- It is widely used in airports, large factories, communities, large exhibition centers and other places, mainly used for the transfer of goods, equipment and other materials.
- Strong load capacity and solid bottom
- Realize fast, safe and convenient transshipment of goods, reduce labor costs and time, and improved security
- Suitable for the transport of goods below 3.5T
- Surface treatment: Painted, upon request



ZYC35-001

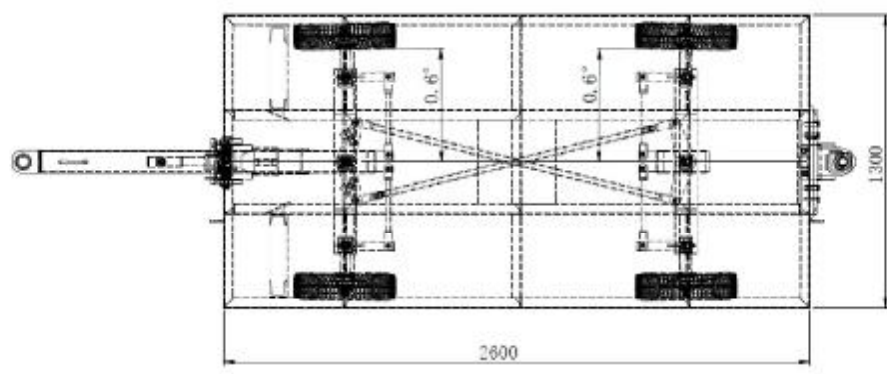




WLC10C-001拖车 Turning Trailer

平板拖车结构简单，维修方便、维修费用低，它由叉车或牵引。一辆牵引车牵引一辆或一辆以上的全挂车组合而成的平板拖车列车。平板拖车具有承重能力强、运输效率高等优势，适用于工厂、码头、港口、仓库等场区内大宗货物周转运输。

- 承载：1000kg
- 外框尺寸：3360×760×439 mm (长×宽×高)
- 净重：193kg
- 表面处理：喷漆

Flatbed trailers are simple in structure, easy to maintain and low maintenance costs. It is pulled by a forklift or tractor, a tractor trailer that combines one or more trailers with a tractor. Flatbed trailers have the advantages of strong load-bearing capacity and high transport efficiency, and are suitable for the turnover of bulk cargoes in factories, docks, ports, warehouses and other areas.

- Capacity: 1000kg
- Outer frame size: 3360×760×439 mm(L×W×H)
- Unit weight: 193kg
- Surface treatment: painted finish

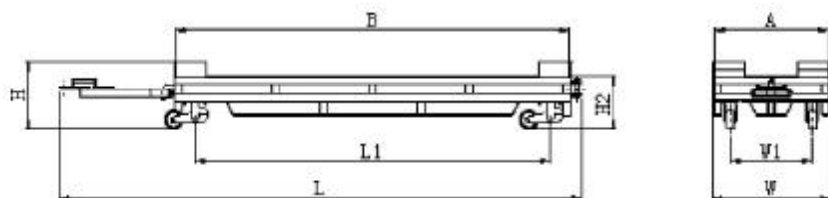


型号 Type	承载量 Capacity(kg)	车长L (mm)	车宽W (mm)	车高H (mm)	滑道高度 H1 (mm)	货物空间 A×B (mm)	轴距L1 (mm)	轮距W1 (mm)	自重 (kg)
WLC10C-001	1000	3360	760	439	-	730×2530	2280	525	193

物料转运车



E-Frame Trailer

物料转运车由转运车和物料小车组成。物料车承载物料，转运车搭载物料车。适用于仓库、车间等地方的物料回车配送。一般的，短距离的物料配送可通过物料车实现，长距离的物料配送由牵引车、转运车和物料小车三者配合实现。它具有转弯半径小，循迹性佳，人力和设备的投入低，维护成本低，搬运效率高，安全性能高等特点。

E Frame Trailer consists of E Frame and material trailer , material trailer carry materials, E Frame carry material trailer. Commonly used in warehouse and material distribution in workshop. Usually short-distance material distribution can be achieved through material trailer, long-distance material distribution is achieved by the combination of tractors, E Frame and material trailer. E Frame trailer has the advantages of small turning radius, low manpower and equipment investment, low maintenance costs, high handling efficiency, and high safety performance.

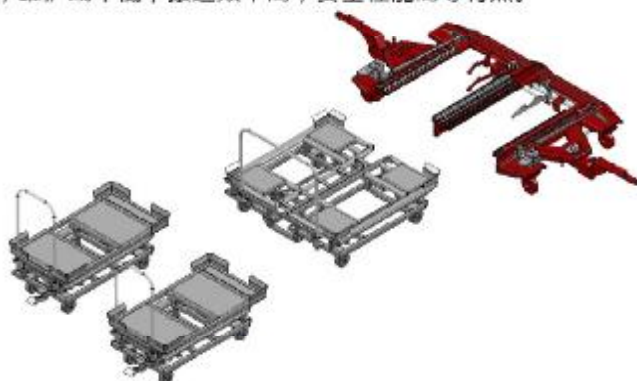


>>>> 转运车 E-Frame

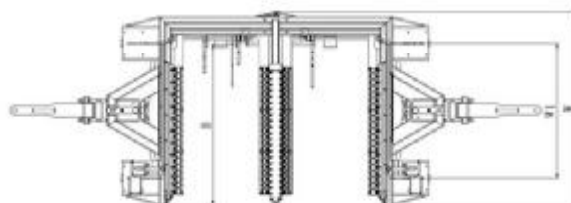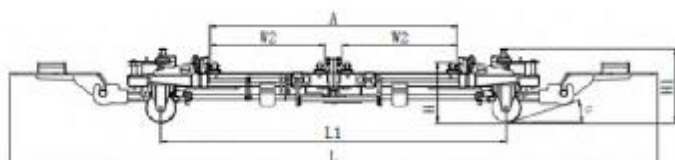

型号 Type	承载量 Capacity(Kg)	车长 Length (mm)	车宽 Width (mm)	工作台高度 Height Of Working Platform (mm)	工作空间 Working Space AXB (mm)	单框尺寸 Unit Size W2 (mm)	轴距L1 Wheelbase (mm)	轮距W1 Distance Between The Wheels (mm)	转弯半径 Turning radius (mm)	自重 Unit Weight (kg)
ZYC10B-001	1000	3500	1290	322	1340X1055	624	1873	893	3000	300



>>>> 物料车 Material Trailer

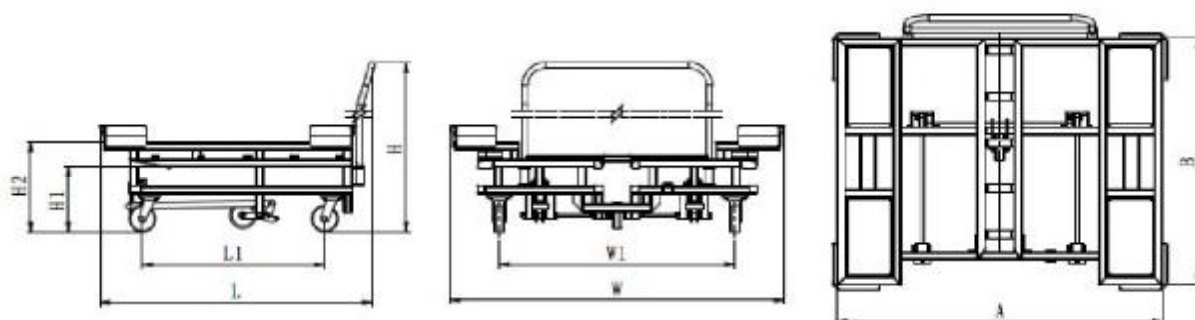

型号 Type	承载量 Capacity (kg)	车长L (mm)	车宽W (mm)	车高H (mm)	滑道高度 H1 (mm)	货物空间 AXB (mm)	轴距L1 (mm)	轮距W1 (mm)	自重 (kg)
WLC05A-001	500	1280	683	990	311	620X1160	869	410	105
WLC10A-001	1000	1300	1336	1000	311	1240X1180	869	1125	130
WLC10A-002	1000	1300	1550	1000	311	1540X1180	869	1125	143
WLC10A-003	1000	1170	1336	1000	311	1240X1040	869	1125	126
WLC10A-004	1000	1340	1753	1000	311	1730X1220	869	1125	154
WLC10B-001	1000	1260	1336	810	311	1220X1160	869	1125	200

倾卸斗 Tipping Bin

- 用途广泛，超低高度设计，操作简单，安全实用，是收集车床、切割机、锯床等废料的理想工具
- 该产品标配4个吊耳可配合行车、起重机或其他一些起吊设备使用，通过链条将翻斗车和叉车连接在一起防止翻斗车在工作过程中滑落
- 可选配橡胶轮或铸铁轮
- 表面处理：喷漆或镀锌
- Wide applications,super-low height design,easy operation,safe and practical tipping bin is the best tool for collecting waste of lathe, cutting machine and sawing machine,etc.
- It is equipped with standard attachments of 4 lifting lugs and can be used on crane and other lifting equipments.By chain to connect dumper and forklift,avoiding falling during the operation
- Both rubber and cast iron wheels are available for option
- Surface treatment: painted or galvanized finish



型号 Type	容量 Capacity (cu.m)	载荷 SWL (kg)	最大货叉尺寸 Max.Fork Size (mm)	长 Length (mm)	高 Height (kg)	宽 Width (kg)	单重 Unit Weight (kg)
CFS6	0.35	350	140×65	1120	860	730	65
CFS9	0.5	350	140×65	1120	860	1030	77
CSD9	0.95	1000	185×75	1570	1010	1010	180
CSD12	1.25	1000	185×75	1570	1010	1310	205
CSD15.2	1.6	1000	185×75	1570	1010	1630	224
CSD18	1.85	1000	185×75	1570	1010	1910	245
DB500	0.5	1000	160×65	1025	745	1200	200
DB800	0.8	1000	160×65	1025	1045	1200	225
DB1100	1.1	1000	160×65	1025	1345	1200	250

倾卸斗

Drop Bottom Bins

- 专为有效存储和转移所有废物而设计，通过简单的基座底部排空，允许将物料完全排空到较大的料仓或自卸车中。当垃圾箱下降到地面时，基座通过自动锁定机构关闭
- 可以快速和完整地倾倒地垃圾
- 重型3mm加强板可处理所有废品
- 通过叉车或桥式起重机轻松运输
- 通过拉绳机构将底座从驾驶席安全释放
- 强大的减震系统消除了清空过程中叉车或起重机的所有冲击
- 标准配置的起重机吊耳
- 可选配车轮
- 可选配镀锌盖
- 表面处理：镀锌
- It is designed for the efficient storage and transfer of all waste materials. This bin is emptied via a simple drop bottom base, allowing complete emptying of contents into a larger bin or dump truck. Base is closed by an automatic locking mechanism when bin is lowered to the ground



DB500

- Drop bottom based allows fast and complete dumping of waste
- Heavy-duty 3mm reinforced plate to handle all waste products
- Easily transported by forklift or overhead crane
- Drop bottom base released safely from driver's seat via a pull cord mechanism
- Powerful shock absorbing system removes all impact from the forklift or crane during emptying
- Crane lugs fitted as standard
- Optional wheels available on request
- Optional galvanised lid available on request
- Surface treatment: galvanised finish

型号 Type	容量 Capacity (cu.m)	载荷 SWL (kg)	最大货叉尺寸 Max.Fork Size (mm)	长 Length (mm)	高 Height (mm)	宽 Width (mm)	单重 Unit Weight (kg)
DB500	0.5	1000	160x50	1025	745	1200	200
DB800	0.8	1000	150x60	1025	1045	1200	225
DB1100	1.1	1000	150x60	1025	1345	1200	250



重型箱

Heavy Duty Crane Bins


WCB9X17-01 重型箱配合起重机或叉车使用，适用于收集和容易处理所有

现场废弃物。配有四个叉套口，便于叉车运输，主要应用于制造和施工现场

- 承载：2000kg
- 净重：240kg
- 最大货叉尺寸：160x90mm
- 外宽尺寸：1718x1158x1100mm(长x宽x高)
- 表面处理：镀锌

Heavy Duty Crane Bins are heavy load crane and forklift bins suitable for collection and easy disposal of all site waste. There are 4-way entry fork pockets, to enable easy transportation by forklift. Mainly used in manufacturing and construction sites

- Capacity: 2000kg
- Unit weight: 240kg
- Max fork size: 160x90mm
- Outer frame size: 1718x1158x1100mm(LxWxH)
- Surface treatment: galvanized finish

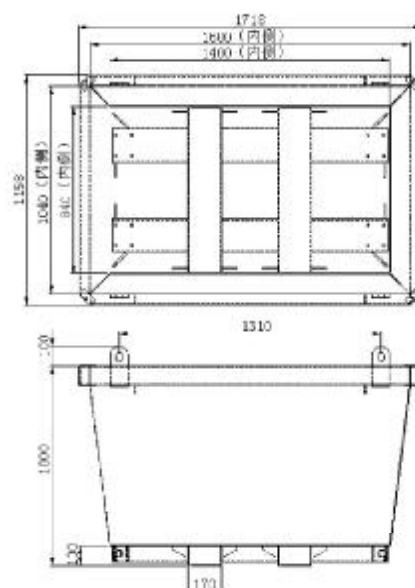

型号 Type	容量 Capacity (m³)	载荷 SWL (kg)	货叉套中心距 Fork Pocket Centres(mm)	货叉套尺寸 Fork Pocket Size(mm)	长 Length (mm)	宽 Width (mm)	高 Height (mm)	单重 Unit Weight (kg)
SCB215	1.25	2000	860	165x70	1450	1170	1000	269
SCB115	1.25	1000	860	165x70	1450	1170	1000	192
SCB212	0.8	2000	860	165x70	1170	1170	800	204
SCB221	1.7	2000	860	165x70	2050	1170	1000	341
WCB9X17-01	1.25	2000	450	160x90	1718	1158	1100	240

箱子倾斜体

Turning Trailer BTS-10-01

- 采用弹簧升降结构，使用简单，安装方便；利用弹簧升降倾倒废料、液体，节省人力；随着IBC容纳的液体量减少，弹簧升降结构将容器升高至最大10度。配有叉套，便于叉车运输，应用于农场、工厂等，是倾倒废料、液体的好助手。
- 外框尺寸：1200mm长x1130mm宽
- 承载：2000kg
- 净重：106kg
- 表面处理：喷漆或镀锌
- Adopt spring lifting structure, easy to use and install; use spring to lift and dump waste and liquid, save manpower. As the volume of liquid contained in the IBC reduces, the spring mechanism will raise the container up to a maximum of 10 degrees. Comes complete with fork pockets to enable easy transportation by forklift. Used in farms, factories, etc., is a good assistant to dump waste and liquids.
- Overall dimensions: 1200mm long x 1130mm wide
- Working Load Limit (WLL): 2000kg
- Unit Weight: 106kg
- Surface treatment: painted or galvanized finish








货叉延伸器

Fork Spreader

- 用于搬运石膏板、房屋盖板、木板、塑料管等超宽或易损产品
- 安装类型：悬挂式或套入式
- 表面处理：喷漆
- Designed to carry products of extra width or high risk of damage, such as plaster board, roof sheeting, timber and plastic tube, etc
- Installation methods: slip-on or mounted
- Surface treatment: painted finish

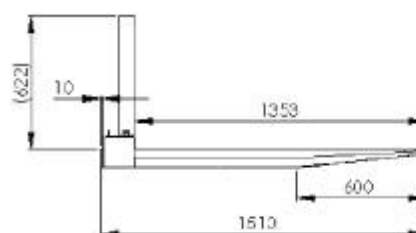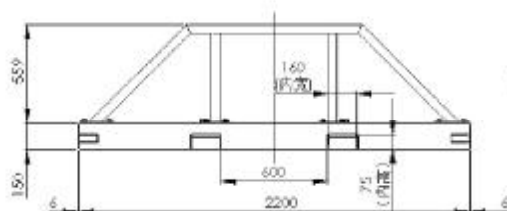

型号 Type	宽度 Width (mm)	载荷 SWL (kg)	货叉套中心距 Fork Pocket Centres (mm)	货叉套尺寸 Fork Pocket Size (mm)	货叉长度 Fork length (mm)	单重 Unit Weight (kg)
FFS300L-01	300	3000	775	160x60	1060	262
FFS220L-01	220	3000	775	160x60	1350	260

液压铲斗

Hydraulic Dirt Bucket

- 该铲斗可通过液压油缸进行前后翻倾，应用于装卸
疏松货物如：沙子、煤、谷物、混凝土等
- 铲斗前端焊有一块耐磨材料加工的铲刀
- 表面处理：喷漆或镀锌
- Realizing both forward and backward
tipping through hydraulic cylinder, this
bucket is suitable for loading
- A blade made of wear-resistant material
is welded in the front of the bucket
- Surface treatment: painted or galvanized
finish




型号 Type	斗外框尺寸 Outer Bucket Dimension (mm)	最大货叉尺寸 Max.Fork Size(mm)	货叉间距 Fork Distance (mm)	净重 Unit Weight (kg)	承载量 Capacity (kg)	容量 Volume (m) ³	铲斗钢板厚度 Bucket Plate Thickness (mm)
DBHS-12	1100x570x1200	180x65	700	306.0	1000	0.50	5
DBHS-14	1100x570x1400	180x65	700	348.0	1000	0.55	6
DBHS-16	1100x570x1600	180x65	700	366.0	1000	0.65	6
DBHS-18	1100x570x1800	180x65	700	384.0	1000	0.75	6
DBHS-20	1100x570x2000	180x65	700	402.0	1000	0.80	6

起重延伸器

Forklift Spreader Beam

- 一种独特的多任务吊杆，可用于起重机或叉车来提升细长形货物。该装置的两端都有一个安全旋转钩。
- 最大承载：9000kg
- 中心距：2405mm
- 净重：172kg
- 垂直重心：300mm
- 表面处理：可伸缩臂镀锌，主体涂上“安全橙色”。
- Spreader Beam is a unique multitasking Beam which can be used by crane or forklift to lift long loads. The unit is supplied standard with a safety swivel hook each end.
- Rated Capacity (RC Max.): 9000kg
- Load Centre (LC): 2405mm
- Unit Weight: 172kg
- F/Lift HCG: 300mm
- Surface treatment: The extendable arms are zinc plated, with the main body painted in 'safety orange'.



CFL-2439

额定承载 Rated Capacity(RC) When Used As	完全回缩时 Fully Retracted (LC @ 2405mm)	中间位置时 Middle Position (LC @ 3165mm)	延伸至最长位置时 Fully Extended (LC @ 3925mm)
作为叉车属具使用时 Forklift Attachment	3500KG	1500KG	750KG
作为起重梁使用时 Lifting Beam	4500KG	2500KG	1300KG
作为吊具梁使用时 Spreader Beam	9000KG	7200KG	5600KG



排雪犁

Snow Plough

- 该产品可用于叉车或堆高车上，清除道路上的雪块或淤泥等一些轻型障碍物
- 可使排雪犁向左、向右排雪
- 安装方式：套入式/挂钩式
- 前部装有聚氨酯刀板
- Used on forklifts or stackers for clearing light barriers like snow and sludge
- Able to work to left and right
- Installation method: slip-on/mounted-on
- Equipped with polyurethane blade in the front



SPE



PXLE



SSP



PXLB



PXLD

类型 Type	型号 Catalog Order No.	最大货叉尺寸 Max.Fork Size (mm)	净重 Unit Weight (kg)	排雪板尺寸 Blade Dimension (mm)	安装方式 Installation Method	表面处理 Surface Treatment
SPE	SPE-11	180x80	105.9	684x1200	套入式 Slip-on	镀锌或喷漆 Galvanized /Painted
	SPE-12	180x80	110	684x1300		
	SPE-13.5	180x80	118.8	684x1500		
	SPE-16	180x80	164	684x1800		
	SPE-18	180x80	180	684x2000		
	SPE-20	180x80	189	684x2400		
SSP	SSP-18	180x80	188	684x1800		
PXLB	RC12/15		518	900x2500(3500)	挂钩式 Mounted-on	镀锌或喷漆 Galvanized /Painted
	RC20		515	900x2500(3500)		
	Stor volvo		541	900x2500(3500)		
PXLD	PXLD	130x60	157.6	520x1800	套入式 Slip-on	镀锌或喷漆 Galvanized /Painted
PXLE	PXLE	100x50	49	360x1500		



起重储运箱

Heavy Duty Storage Box

- SBS型重载起重储存箱有两种尺寸可供选择，储物箱用于在车间内或运输过程中安全存放重量较大的部件/零件。
- 可以通过叉车或起重机运输，满载时可堆叠至4高。
- 两款型号都配备了一个半下拉式前面板，便于使用。
- 安全工作荷载：1000kg
- 净重：SBS75：58kg SBS115：115kg
- 外形尺寸（包括吊耳）：
SBS75 - 750 x 750 x 616mm（长x宽x高）
SBS115 - 1150 x 1150 x 776mm（长x宽x高）
- 表面处理:镀锌
- Storage Boxes are available in two sizes and have been designed for the secure handling of heavy weight components/parts in and around your workshop and during transport.
- Can be transported by forklift or crane and is stacked up to 4 high when fully loaded.
- Both models feature a half drop-down front panel for ease of access.
- Working Load Limit (WLL): 1000kg
- Unit weight: SBS75: 58kg;SBS115: 115kg
- Overall dimensions (including crane lugs):
SBS75-750 x 750 x 616mm high ; SBS115-1150 x 1150 x 776mm high
- Surface treatment: galvanized finish



型号 Type	载荷 SWL (kg)	总宽 Overall Width (mm)	总深 Overall Depth (mm)	总高 Overall Height (mm)	容量 Volume	单重 Unit Weight (kg)
SMB750	1500	750	750	620	158L	58
SMB1150	1500	1150	1150	780	580L	113
SBS75	1000	750	750	790	200L	58
SBS115	1000	1150	1150	750	650L	115
WDS160	1000	1450	840	1150	1400	200
WDM160	1000	1450	840	1150	1400	145

布袋搬运器

Bulk Bag Lifter BBP2000

- 适用于布袋运输，操作简便
- 可选配专用放置架，方便安装，拆卸，存放
- 载荷中心：725mm
- 安全工作载荷：2000kg
- 串杆中心距：800mm
- 净重：200kg
- 表面处理：喷漆
- Suitable for transporting bulk bags, easy to handle
- Optional stand is available, easy to install, dismantle and store
- Load center: 725mm
- Safe working load: 2000kg
- Prong center: 800mm
- Unit weight: 200kg
- Surface treatment: painted finish



布袋搬运器

Bulk Bag Lifter BBF4

- 与行车，起重机配合使用，用于布袋运输
- 安全工作载荷:2000kg
- 净重：55kg
- 相邻吊钩间距：1000mm
- 表面处理：喷漆
- Suitable for lifting bulk bags by crane or travelling crane
- Safe working load: 2000kg
- Unit weight: 55kg
- Neighbor hooks distance: 1000mm
- Surface treatment: painted finish



布袋搬运器 Big Bag Lifter BBH1000

- 适用于单个布袋运输
- 安全工作载荷：1000kg
- 安装方式：悬挂式
- 净重68.0kg
- 表面处理：喷漆
- Economical way to handle single bag.
- Safe working load: 1000kg
- Installation method: carriage mounted
- Unit weight: 68.0kg
- Surface treatment: painted finish


内臂位置 Position	L(mm)	H(mm)	承载量 Capacity(kg)
①	860	840	1000
②	995	980	910
③	1130	1110	830
④	1265	1245	760
⑤	1400	1380	710



布袋搬运器 Big Bag Lifter BBF1000

- 适用于单个布袋运输
- 安全工作载荷：1000kg
- 安装方式：套入式
- 净重：90.0kg
- 表面处理：喷漆
- Economical way to handle single bag.
- Safe working load: 1000kg
- Installation method: slip-on
- Unit weight: 90.0kg
- Surface treatment: painted finish

内臂位置 Position	L(mm)	H(mm)	承载量 Capacity(kg)
①	1320	700	1000
②	1450	840	910
③	1585	975	830
④	1720	1110	760
⑤	1850	1245	710

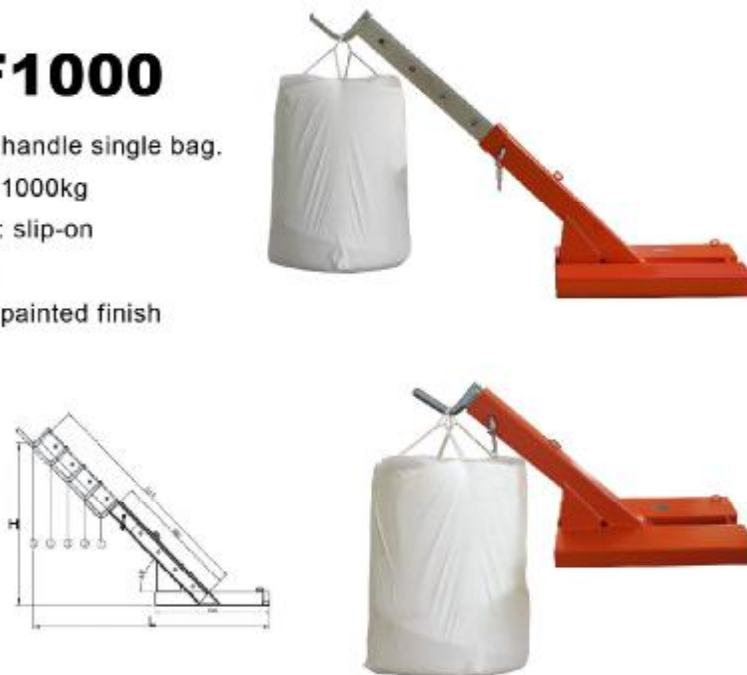

布袋搬运器

Big Bag Lifter BBF1500A

- 适用于单个布袋运输
- 安全工作载荷：1500kg
- 安装方式：套入式
- 净重：147.5kg
- 最大货叉尺寸：228x60mm
- 表面处理：喷漆
- Economical way to handle single bag.
- Safe working load: 1500kg
- Installation method: slip-on
- The maximum size of fork: 228x60 mm
- Unit weight: 147.5kg
- Surface treatment: painted finish

内臂位置 Position	L (mm)	H (mm)	承载量 Capacity(kg)
①	1445	910	1500
②	1575	1045	1350
③	1710	1180	1250
④	1845	1315	1000
⑤	1980	1445	750




布袋搬运器

Big Bag Lifter BBF2000

- 适用于两个布袋运输
- 安全工作载荷：2000kg
- 安装方式：套入式
- 最大货叉尺寸：180x60mm
- 净重：153.5kg
- 表面处理：喷漆
- Suitable for lifting two big bags at the same time.
- Safe working load: 2000kg
- Installation method: slip-on
- The maximum size of fork: 180x60 mm
- Unit weight: 153.5kg
- Surface treatment: painted finish

内臂位置 Position	L (mm)	H (mm)	承载量 Capacity(kg)
1	1410	785	2×1000
2	1535	930	2×910
3	1670	1060	2×830
4	1805	1195	2×760
5	1940	1330	2×710



电池搬运器

Battery Removal Jib

- 专为快速，安全地拆卸和更换电动叉车电池组而设计，简单高效
- 该装置配有多个吊点以适应2个或4个吊点，外部吊钩点位于500 x 900毫米的中心，适用于叉车或起重机
- 提供4个吊钩和4条安全绝缘链，能够安装在叉车或桥式起重机上
- 安全工作荷载：2000kg
- 净重：64kg
- 叉套尺寸：165 x 65mm
- 表面处理：镀锌
- Battery Handling is designed for the quick, safe removal and replacement of battery packs in electrically operated forklifts, simple and efficient
- There are multiple lifting points to suit either 2 or 4 lift point batteries with outer hook points at 500 x 900mm centers and is suitable for use with either forklift or crane.
- Supplied with 4 hooks and electrically insulated slings, able to be fitted to a forklift or overhead crane
- Safe working load: 2000kg
- Unit weight: 64kg
- Fork pocket dimension: 165x65mm
- Surface treatment: galvanized finish



型号 Type	挂钩中心距 Hook Centres (mm)	载荷 SWL (kg)	货叉套中心距 Fork Pocket Centres(mm)	货叉套尺寸 Fork Pocket Size(mm)	载荷中心 Load Centre (mm)	单重 Unit Weight (kg)
SBJ6	560x916	2000kg	278	185x65	634	78

托盘架

Filling Rack

这个托盘架主要用于存储材料，是仓库和庭院储存的绝佳形式。设计用于长时间存放货物以便于运输，可以堆放起来以利用仓库中的空间。

- 外形尺寸：770x1065x1695mm
- 内部尺寸：625x920x1550mm
- 承载：2000kg
- 堆叠高度：按实际每托承载量计算(空载和满载堆叠高度不一致)
- 表面处理：镀锌

This Filling Rack are used largely to store material in a systematic way,an excellent form of warehouse and yard storage.Designed to store long awkward objects for easy transport,these units may be stacked to make use of the vertical space in your warehouse.

- External Dimensions: 625x920x1550mm
- Internal Dimensions: 625x920x1550mm
- Load Capacity: 2000kg
- Safe Stacking Height: Stacking height: Calculated according to the actual carrying capacity per pallet (inconsistent stack heights for empty and full loads)
- Surface treatment: galvanized finish





弹簧升降平台

Spring Lift Table

装载或卸载货物时，它自动将托盘或静止的负载物保持在最佳工作高度。托盘台可以升降475mm，而旋转的上部环可以在堆叠过程中使托盘旋转。凭借最佳工作高度，使操作员的疲劳度降低，同时提高了生产力。弹簧升降平台配备三个弹簧。取决于货盘的重量，可以根据需要使用其中的一个，两个或三个。减震器提供逐步和受控的升降。设计有叉套，便于叉车运输。



- 承载: 2000kg
- 压缩时高度: 230mm
- 伸展时高度: 705mm
- 旋转台直径: 1110mm
- 净重: 168kg
- 表面处理: 镀锌
- It automatically keeps the pallet or stillage load at the optimum working height when loading or unloading goods. The table can be raised and lowered 475mm while the rotating upper ring allows for pallet rotation during stacking. With an optimum working height operator fatigue is reduced while productivity is increased. Rotate Pallet Table comes complete with three springs. Either one, two or three of these are used as required depending on weight of the pallet. A shock absorber provides gradual and controlled raising and lowering. Comes complete with fork pockets to enable easy transportation by forklift.
- Capacity: 2000kg
- Compress height: 230mm
- Extended height: 705mm
- Turntable Diameter: 1110mm
- Unit weight: 168kg
- Surface treatment: galvanized finish

型号 Type	旋转台面直径 Rotating Table Diameter(mm)	载荷 SWL (kg)	升降高度 Lift Height (mm)	货叉套中心距 Fork Pocket Centres(mm)	货叉套尺寸 Fork Pocket Size(mm)	单重 Unit Weight (kg)
3615-000000	1100	2000	230-705	740	165x45	148



储油盒

Oil Spill Bin

- 适用于200L圆桶的安全存储和灌装作业场合，可用于存放危险等级为 F/F+ 的可燃，不可燃物质，以及危险等级为1-3级的水污染物，保证现场清洁的同时可避免不必要的浪费
- 表面处理：镀锌
- It is suitable for safe storage and filling for 200L round barrel, and can be used on storing flammable, non- flammable materials with risk rating of F/F+, and water pollutants ranging from 1-3 level in risk rating, thus keeping the worksite clean and avoiding unnecessary waste.
- Surface treatment: galvanized finish



型号 Type	外框尺寸 Overall Size (mm)	200L标准桶的数量 No. of Drums	净重 Unit Weight (kg)	承载量 Capacity (kg)	容量 Volume (m ³)
SL1	490x810x760	1	55.0	2000	0.25
SL2	440x1210x610	2	60.0	2000	0.25
SL4	266x1210x1210	4	70.0	2000	0.25

气瓶车

Gas Cylinder Cage GBT

- 本产品可以快速地搬运一个氧气瓶或乙炔瓶
- 安全工作载荷：75kg
- 净重：12.0kg
- Fast transportation of an oxygen or acetylene cylinder
- Safe working load: 75kg
- Unit weight: 12kg



气瓶车

Gas Cylinder Trolley GCN2

- 本产品可同时装二个气瓶，并可将气管存放在内，内部配有紧固带，能安全有效地将气瓶固定住
- 本产品配有拉手和400mm的充气轮及吊耳，可以在地面推动，也可以用行车吊运
- 安全工作载荷:250kg
- 净重:80kg
- This products can be equipped with two gas cylinders including their gas pipes at the same time, and with securing strap to fix the gas cylinders safely and effectively.
- Fitted with handle, 400mm dia. air-inflated rubber wheels and lifting lug, it can be moved on the ground or lifted by bridge crane
- Safe working load: 250kg
- Unit weight: 80kg





货叉架型钢

Carriage Bar

- 该类型产品所有都是依照ISO2330标准进行设计和加工
- 每副型钢包含 根上型钢和 根下型钢
- 槽口尺寸根据ISO2330 NBR I, NBR II, NBR III, NBR IV进行设计和加工
- 材质: Q345B
- 所有型钢均可在标准货叉架制做时使用
- 可根据客户要求设计和生产各种类型的货叉架型钢
- All the Carriage Bars are designed and processed in accordance with ISO2330 standard
- Each set of carriage bars is supplied with one upper and one lower bar
- The dimension of notches are designed and processed according to ISO2330 NBR I, NBR II, NBR III or NBR IV
- It is made of Q345B
- All bars are ready for welding into standard carriages
- Various types of carriage bars can be designed and produced according to customers' specifications





型号 Type	宽x厚x长 WxTxL	净重(kg/付) Unit Weight(kg/pair)	安装等级 Mounting Class
CB100x35x1500	100x35x1500	75.6	FEM2
CB50x60x880	50x60x880	34.72	FEM2
CB50x60x1020	50x60x1020	40.24	FEM2
CB50x60x1200	50x60x1200	47.34	FEM2
CB50x60x1320	50x60x1320	52.08	FEM2
CB152x32x870	152x32x870	62.68	FEM2
CB152x32x900	152x32x900	64.86	FEM2
CB100x30x1260	100x30x1260	54.96	FEM2
CB100x35x3000	100x35x3000	151.2	FEM2
CB150x38x870	150x38x870	72.6	FEM2
CB50x70x1020	50x70x1020	48.44	FEM3
CB50x70x1200	50x70x1200	57	FEM3
CB125x50x1800	125x50x1800	154.8	FEM3
CB125x50x2000	125x50x2000	172.06	FEM3
CB148x40x1250	148x40x1250	109.4	FEM3
CB148x40x1500	148x40x1500	131.4	FEM3
CB148x45x870	148x45x870	85	FEM3
CB150x50x1500	150x50x1500	164.2	FEM4
CB150x50x1600	150x50x1600	174.7	FEM4
CB150x50x2000	150x50x2000	216.7	FEM4
CB150x50x2400	150x50x2400	259.62	FEM4

货叉

Forklift Forks

- 我司可生产自由锻货叉
- 我司货叉根据ISO2328-2007、GB5184-85制作，也符合EN12100-1：2003标准
- 载荷测试一百万次
- 材料：40Cr
- 挂钩材料：20Cr；模锻，精确，耐用
- 所有的货叉都经过完全热处理，硬度280-350HB
- 每支货叉都经过硬度和裂缝测试（暗室磁粉测试）
- 我司生产各种货叉：
 - GB、ISO/FEM标准货叉 直板货叉
 - 无挂钩货叉 套筒货叉
 - 大尺寸货叉 可根据客户需要定制异形
- 具有大特异型锻造货叉生产的优势，品质可靠
- We can manufacture free forged forks
- Made in accordance with ISO2328-2007 and GB5184-85, and meets the EN12100-1:2003 standard
- Load testing: 1 million times
- Material: 40Cr
- Hook material: 20Cr; mould forged, high durability and precision
- Fully heat treated to 280-350HB
- Each single forklift fork has passed hardness test and crack test (magnetic powder test in a dark room)
- We can manufacture all kinds of forklift forks including:
 - GBISO/FEM standard forks, straight forks, blank forks, pin type forks, big section forks, special forks as customer demands.
- The advantages of large and special forged forks production, reliable quality

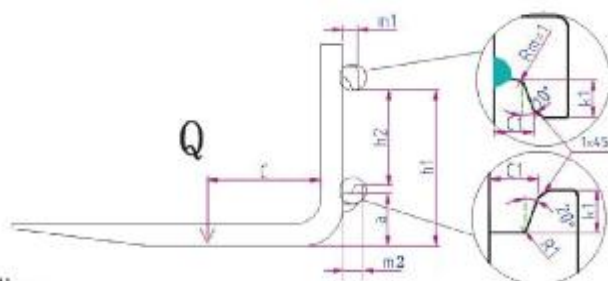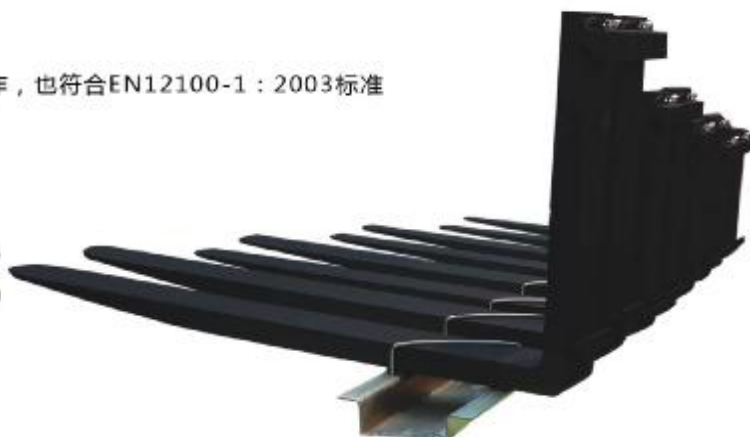

等级 ISO/FEM Mounting class	额定起重量 Lifting capacity(kg)	额定载荷中心距 Load Center C	货叉形式 Type a	C_{10}^*	$h_1 \pm 3$	h_2	m_1	m_2	k_1
1(I)	1~999	400/600	A 76	16.5	394	306^{+1}_0	28	26	14
			B 114		432				
2(II)	1000~2500	500/600	A 76	16.5	470	382^{+1}_0	31	29	14
			B 152		546				
3(III)	2501~4999	500/600	A 76	22	568	477^{+15}_0	40	38	17
			B 203		695				
4(IV)	5000~6800	600	A 127	26	743	598^{+15}_0	47	45	20
			B 254		870				

称重货叉

Weighing Forks

- 称量范围：0.5kg ~ 3000kg
- 称量精度：≤2‰
- 准确度等级：Ⅲ级
- 使用温度：0℃ ~ 40℃
- 信号传输：有线传输和无线蓝牙传输
- 安装等级：FEM3
- Weighing Range: 0.5kg ~ 3000kg
- Accuracy: ≤2‰
- Accuracy Grade: III
- Working temperature: 0℃ ~ 40℃
- Signal Transmission: wire and wireless optional
- Mounting Class: FEM3

货叉型号 Catalog Order No.	承载量/载荷中心 Capacity/ Load Center (kg)/(mm)	安装等级 Mounting Class	货叉宽度 Width (mm)	货叉厚度 Thickness (mm)	货叉长度 Length (mm)	信号传输方式 Signal transmission method
HCC30DW-C001-L	3000/500	III	125	55	1000-1400	无线 Wireless
HCC25DW-C001-L	2500/500	III	100	45	1000-1400	无线 Wireless
HCC30DY-C001-L	3000/500	III	125	55	1000-1400	有线 Wire

- 自动键盘标定，量程由软件自动调整，可设定不同的(kg/lb)称重单位
- 开机同关机显示电池的电量数值，具有自动省电模式和自动关机功能，电源电压不足指示及电压过低自动关机功能
- 抗干扰能力强，误操作不会丢失重要参数，程序能自动恢复。具有消除震动、晃动的滤波功能
- 垂直状态提示称重功能，可设置称重物品重量高低位报警功能，内置设定物品称重数值报警功能
- 具有零点自动跟踪，零位异常指示，超载报警等功能
- 可进行货物件数计量、编码输入以及日期、时间标示
- 可增加“蓝牙”配置功能或外控接口功能
- Automatic keyboard and automatic range, adjustable weighing unit
- Numerical value display on battery when power on and power off, automatic power off when under voltage, energy economically
- Anti-jamming capability, program fallback and filtrate function
- Self-weigh on vertical position, approve for install the hi-lo signal alarm and weigh numerical value alarm of product
- Null point automatic tracking and abnormal indication, overload alert
- Indicate the quantity measure, encode input, date and time
- Wireless blue tooth and W-Lan output available






挂钩式货叉

Standard Forks




套筒式货叉

Pin Type Forks

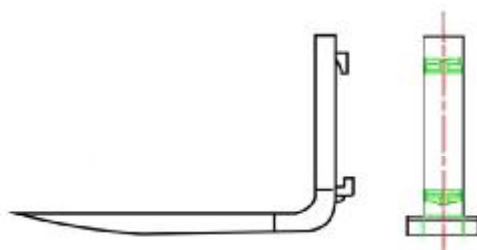


异型货叉

Special Forks




折叠式货叉

Folding Forks




直货叉

Straight Forks

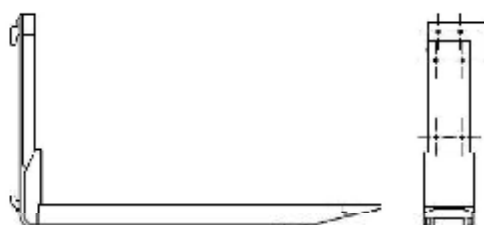

称重货叉

Mobile Weighing Forks

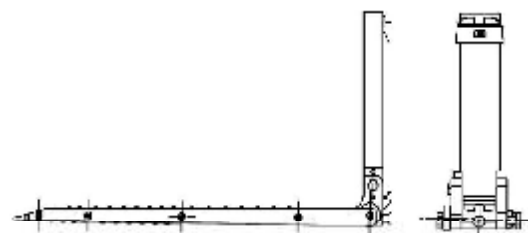

滚轮式货叉

Roller Forks



卡销拉手

Latch Pin Set




挂钩

Hooks

龙合智能出口货叉规格 LH Exported Fork Specification		
安装等级	货叉规格 Size	载荷性能 Load Capacity/pair
ISO/FEM Mounting class	宽x厚x长 WxTxL	载荷/载荷中心 Capacity(kg)/ Load Centre(mm)
II A	80x40xL	2000/500
II A	100x40xL	2500/500
III A	100x45xL	3000/500
II A	100x45xL	3500/500
III A	100x50xL	4000/500
III A	120x40xL	3000/500
III A	120x45xL	4200/500
III A	120x50xL	5000/500
III A	125x45xL	4200/500
III A	125x50xL	5000/500
III A	130x60xL	6000/500
IV A	130x60xL	6000/600
III A	140x50xL	5800/500
III A	150x50xL	6000/500
IV A	150x50xL	5000/600
IV A	150x60xL	8000/600
IV A	150x65xL	8500/600
IV A	150x70xL	9000/600
Pin Type	200x130xL	28000/800
Pin Type	250x130xL	40000/900

龙合智能国内货叉规格 LH National Fork Specification		
安装等级	货叉规格 Size	载荷性能 Load Capacity/pair
ISO/FEM Mounting class	宽x厚x长 WxTxL	载荷/载荷中心 Capacity(kg)/ Load Centre(mm)
II A	100x35xL	1500/500
II A	100x40xL	2000/500
III A	120x40xL	2500/500
III A	100x45xL	2500/500
III A	125x45xL	3000/500
III A	125x50xL	3500/500
III A	150x50xL	4000/500
IV A	150x50xL	4000/600
III A	150x55xL	5000/500
IV A	150x55xL	5000/600
IV A	150x60xL	6000/600
IV A	150x65xL	6000/600
IV A	150x70xL	7000/600
IV A	160x80xL	8000/600
IV A	180x80xL	8000/600
套筒式	200x130xL	12500/800
套筒式	250x130xL	18000/900

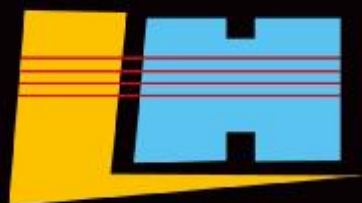

龙合智能

LONGHE INTELLIGENT

* 如遇技术参数变更，恕不另行通知。

All technical data are subject to alteration.

龙合智能装备制造有限公司

Longhe Intelligent Equipment Manufacturing Co.,Ltd

地址 Add.: 中国福建省龙岩市高新技术开发区

New and High-Tech Zone, Longyan, Fujian, China

电话 Tel.: +86 597 5639065 (国内 Domestic)

+86 597 5639061/5639062 (海外 Overseas)

传真 Fax.: +86 597 5639070

E-mail: sale@longheglobal.com (国内 Domestic)

sales@longheglobal.com (海外 Overseas)

网址 Web: www.longheglobal.cn (中文); www.longheglobal.com (英文)