




35000N

设计两个加油孔，两个放油孔，无论加油或者放油都可以更加迅速，其中放油口开在箱体较下侧，整机稍微倾斜就能将齿轮油放尽。

Two oiling holes and two oiling holes are designed for quicker oiling or draining, with the oiling port opening on the lower side of the case and the machine slightly tilted to drain the gear oil.

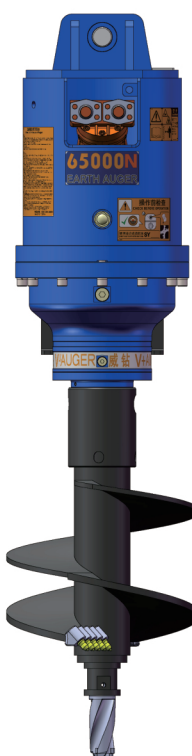

65000N

采用大模数齿轮和齿圈，增强齿轮在极限受力情况下的强度，不易咬齿和磨损。

The use of large modulus gears and gear rings enhances the strength of the gears under extreme stress conditions and makes them less susceptible to galling and wear.

共同特点 Common Features

- 采用三级减速结构，实现更大减速比，输出扭力更大，使整体结构更加紧凑，便于维护及保养。
The three-stage reduction structure achieves a larger reduction ratio and greater output torque, making the overall structure more compact and easy to maintain and repair.
- 连接架和输出轴采用国际统一标准，互换性强。
The connection frame and output shaft adopt international unified standard, which is highly interchangeable.
- 采用超高压柱塞马达，确保在高压下不易冲毁油封，一旦油封损毁，液压油可以从旁通油口流出，便于维护。
The ultra-high pressure plunger motor ensures that the oil seal is not easily destroyed under high pressure, and once the oil seal is destroyed, hydraulic oil can flow out through the bypass port for easy maintenance.



地址：上海市嘉定区曹安公路3652号 邮编：201812
苏州市昆山开发区洪湖路788号 邮编：215333
Add: No.3652 Caoan Road, Jiading District, Shanghai, China
No.788 Honghu Road, Kunshan Development Zone, Suzhou
电话(Tel): 021-69188890 客服热线: 400-009-2829
Http://www.vibracn.com E-mail:manager@vibracn.com

上海冶坤工程机械有限公司
Shanghai Yekun Construction Machinery Co., Ltd
冶坤工程机械（苏州）有限公司
Yekun Construction Machinery (Suzhou) Co., Ltd

螺旋钻机适用范围

Scope of application of auger drilling rig



桩基工程



园林绿化




市政道路




管网工程等

引孔机螺旋钻杆

Auger Drill Pipe

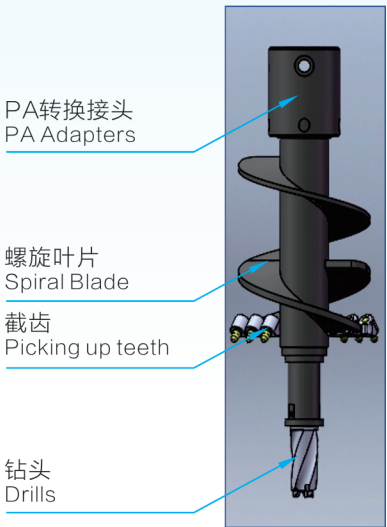

全叶片钻杆
All-Vane Drill Pipe

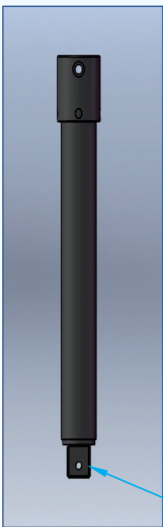

延长钻杆
Extension Drill Pipe

钻杆长度及螺旋叶片都可以定制。
目前我们公司配套的螺旋钻杆为一节6米全叶片钻杆，一节6米全延长杆，一节3米延长杆。
这三种钻杆可通过接头进行拼接，使钻孔深度最大可达15米。当然，如需进行更深引孔作业，也可定制钻杆。
The length of the auger rod and the auger blade can be customized.
At present, the auger rods we have are 6-meter full-blade rods, 6-meter full-extension rods, and 3-meter extension rods.
These three types of auger rods can be spliced together through joints, allowing drilling depths of up to 15 meters. Of course, if deeper pilot holes are required, custom rods are also available.

110x110方轴转换接头
110x110 square Shaft Adapters

引孔机规格

Hole Pulling Machine Specifications

型号 Model Number	扭矩范围(Nm) Torque Range	转速范围(rpm) Speed range	单位重量(kg) Unit Weight	单位直径(mm) Unit Diameter	单位高度(mm) Unit height	输出轴标准(mm) Output axis standard
25000N	12880~25060	21~55	442	460	1278	110正方形
35000N	16385~35872	20~50	450	460	1278	110正方形
42000N	19475~42602	18~43	463	460	1278	110正方形
52000N	26507~52530	11~54	600	524	1320	110正方形
65000N	41351~65786	9~40	615	524	1320	110正方形