



# 产品技术文件


| 双壁套管 Double wall casing                                                                                                       |                            |                                        |                                  |                      |                           |                                   |                                  |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------|----------------------------------|----------------------|---------------------------|-----------------------------------|----------------------------------|
| 产品描述<br>Description                                                                                                           | 直径 DIA.<br>(D1/D2)<br>(mm) | 筒体壁厚<br>Wall Thickness<br>(A1+A2) (mm) | 套管有效长度<br>Wall Length<br>(L)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(mm) | 接头材质<br>Casing Joint<br>Materials | 筒体材质<br>Casing Body<br>Materials |
| 双壁套管<br>Double wall<br>casing                                                                                                 | 660/580                    | 12+8                                   | 6000                             | 1650                 | 6230*660*660              |                                   | GB-Q355B                         |
|                                                                                                                               |                            |                                        | 4000                             | 1130                 | 4230*660*660              |                                   |                                  |
|                                                                                                                               |                            |                                        | 3000                             | 870                  | 3230*660*600              |                                   |                                  |
| Remark: Deformation and accuracy is strictly controlled through heat treatment .<br>备注：产品技术参数沿用宝峨标准。套管接头经过热处理工艺，严格控制变形量，保证精度。 |                            |                                        |                                  |                      |                           |                                   |                                  |

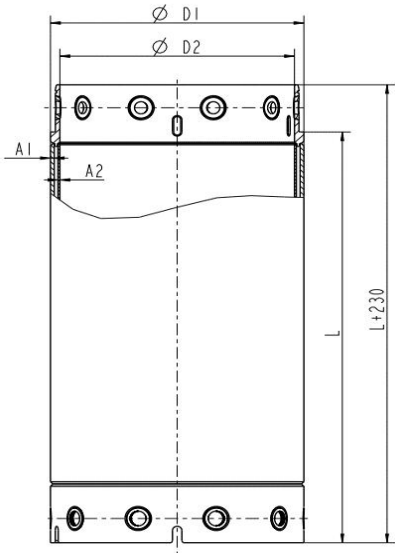

| 双壁套管带靴 Double wall casing with Shoes                                                                                          |                            |                                        |                                  |                      |                           |                                   |                                  |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------------|----------------------------------|----------------------|---------------------------|-----------------------------------|----------------------------------|
| 产品描述<br>Description                                                                                                           | 直径 DIA.<br>(D1/D2)<br>(mm) | 筒体壁厚<br>Wall Thickness<br>(A1+A2) (mm) | 套管有效高度<br>Wall Length<br>(L)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(mm) | 接头材质<br>Casing Joint<br>Materials | 筒体材质<br>Casing Body<br>Materials |
| 双壁套管带靴<br>Double wall<br>casing with<br>Shoes                                                                                 | 660/580                    | 12+8                                   | 6000                             | 1650                 | 6230*660*660              |                                   | GB-Q355B                         |
|                                                                                                                               |                            |                                        | 4000                             | 1130                 | 4230*660*660              |                                   |                                  |
|                                                                                                                               |                            |                                        | 3000                             | 870                  | 3230*660*600              |                                   |                                  |
| Remark: Deformation and accuracy is strictly controlled through heat treatment .<br>备注：产品技术参数沿用宝峨标准。套管接头经过热处理工艺，严格控制变形量，保证精度。 |                            |                                        |                                  |                      |                           |                                   |                                  |

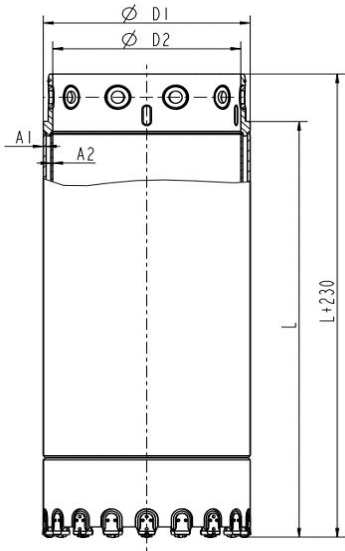

| 套管短靴 Casing Shoes                                                                                                             |                        |                                    |                         |                      |                           |                 |
|-------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------|-------------------------|----------------------|---------------------------|-----------------|
| 产品描述<br>Description                                                                                                           | 直径 DIA.<br>(D1/D2)(mm) | 筒体壁厚<br>Wall Thickness<br>(T) (mm) | 长度<br>Length<br>(L)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(mm) | 齿数<br>Teeth NO. |
| 套管靴<br>Casing Shoes                                                                                                           | 660/580                | 40                                 |                         |                      |                           |                 |
| Remark: Deformation and accuracy is strictly controlled through heat treatment .<br>备注：产品技术参数沿用宝峨标准。套管接头经过热处理工艺，严格控制变形量，保证精度。 |                        |                                    |                         |                      |                           |                 |

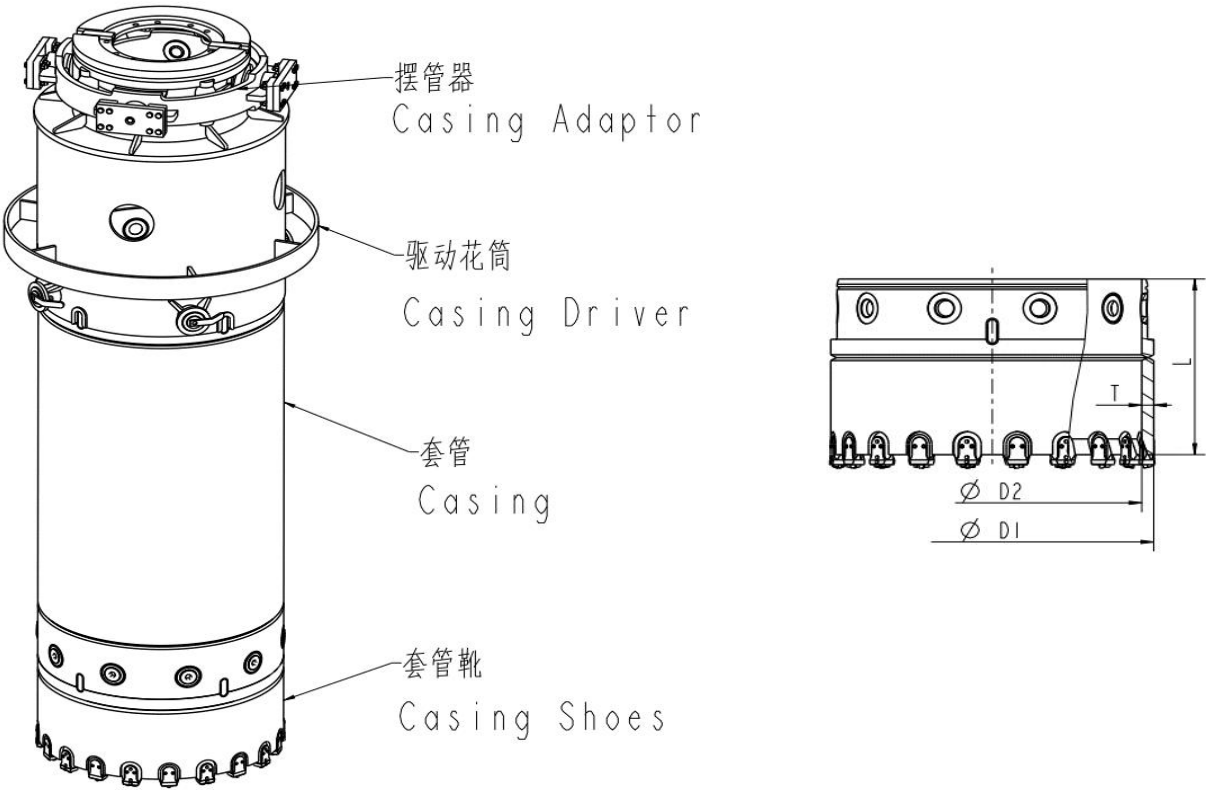


## 单壁套管 Single wall casing

| 产品描述<br>Description           | 直径 DIA.<br>(D1/D2)<br>(mm) | 筒体壁厚<br>Wall Thickness<br>(T1)(mm) | 套管有效高度<br>Wall Length<br>(L)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(mm) | 接头材质<br>Casing Joint<br>Materials | 筒体材质<br>Casing Body<br>Materials |
|-------------------------------|----------------------------|------------------------------------|----------------------------------|----------------------|---------------------------|-----------------------------------|----------------------------------|
| 单壁套管<br>Single wall<br>casing | 660/580                    | 16                                 | 6000                             | 1650                 | 6230*660*660              |                                   | GB-Q355B                         |
|                               |                            |                                    | 4000                             | 1130                 | 4230*660*660              |                                   |                                  |
|                               |                            |                                    | 3000                             | 870                  | 3230*660*600              |                                   |                                  |

Remark: Deformation and accuracy is strictly controlled through heat treatment .

备注：产品技术参数沿用宝峨标准。套管接头经过热处理工艺，严格控制变形量，保证精度。

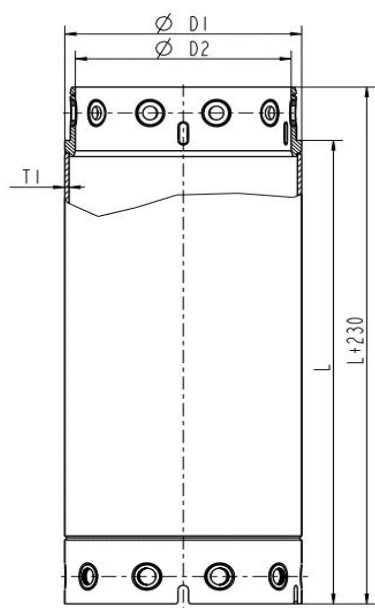


## 单壁套管带靴 Single wall casing with Shoes

| 产品描述<br>Description                           | 直径 DIA.<br>(D1/D2)<br>(mm) | 筒体壁厚<br>Wall<br>Thickness<br>(T1)(mm) | 长度<br>Wall Length<br>(L)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(mm) | 接头尺寸<br>Casing Joint<br>Materials | 筒体材质<br>Casing Body<br>Materials |
|-----------------------------------------------|----------------------------|---------------------------------------|------------------------------|----------------------|---------------------------|-----------------------------------|----------------------------------|
| 单壁套管带靴<br>Single wall<br>casing with<br>Shoes | 660/580                    | 16                                    | 6000                         | 1650                 | 6230*660*660              |                                   | GB-Q355B                         |
|                                               |                            |                                       | 4000                         | 1130                 | 4230*660*660              |                                   |                                  |
|                                               |                            |                                       | 3000                         | 870                  | 3230*660*600              |                                   |                                  |



Remark: Deformation and accuracy is strictly controlled through heat treatment .

备注：产品技术参数沿用宝峨标准。套管接头经过热处理工艺，严格控制变形量，保证精度。



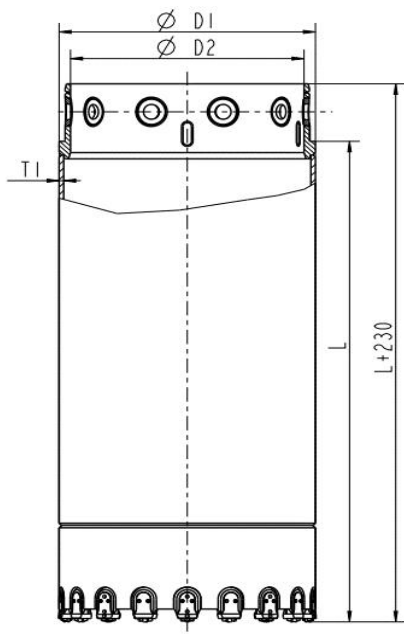


摆管器 Casing Adaptor

| Description           | H<br>(mm) | T1<br>(mm) | T2<br>(mm) | A<br>(°) | B<br>(°) | D1<br>(mm) | K*D2<br>(mm) | D3<br>(mm) | D4<br>(mm) | 重量<br>Weight(kg) | 运输尺寸<br>Dimension<br>(mm) |
|-----------------------|-----------|------------|------------|----------|----------|------------|--------------|------------|------------|------------------|---------------------------|
| 摆管器<br>Casing Adaptor |           |            |            |          |          |            |              |            |            |                  |                           |

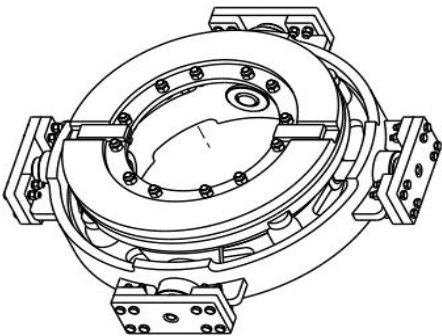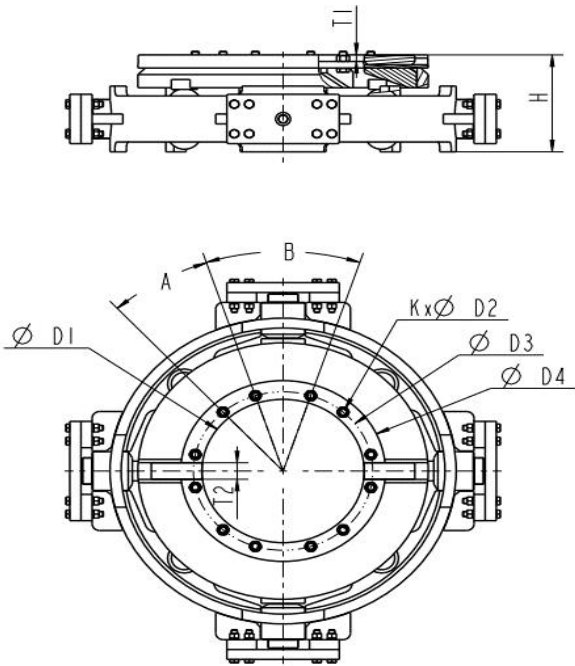



| 驱动花筒 Casing Driver              |         |         |        |         |         |         |                      |                                        |
|---------------------------------|---------|---------|--------|---------|---------|---------|----------------------|----------------------------------------|
| 产品描述<br>Description             | D2 (mm) | D3 (mm) | L1(mm) | L2 (mm) | L3 (mm) | L4 (mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(D1*D1*H)<br>(mm) |
| 660/580mm 驱动花筒<br>Casing Driver |         |         |        |         |         |         |                      |                                        |

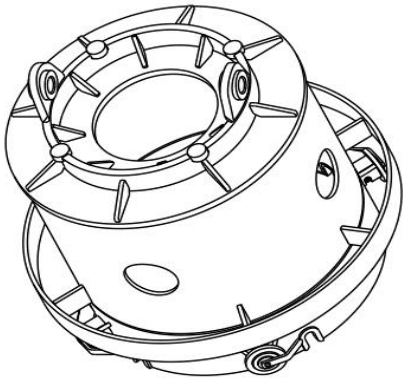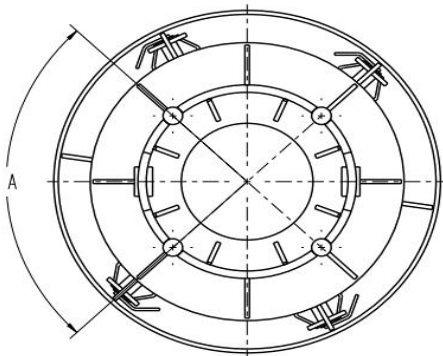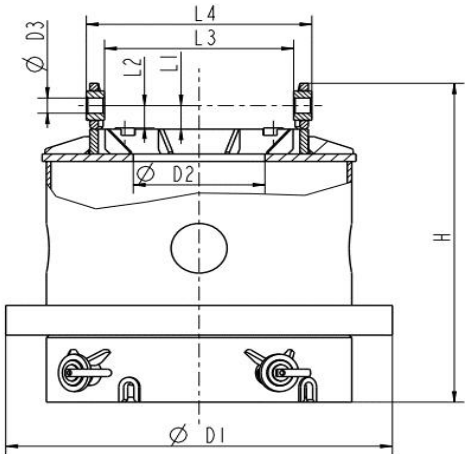

土层捞沙斗-直筒

**Straight Drilling Bucket With Soil Teeth**


| 产品描述<br>Description                                                 | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP1+BP2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 土层捞沙斗<br>600mm Straight<br>Drilling Bucket with<br>Soil Teeth | 1200                          | 16                            | 40+40                                 | 200                                | 640                  | 2100*600*600                     |

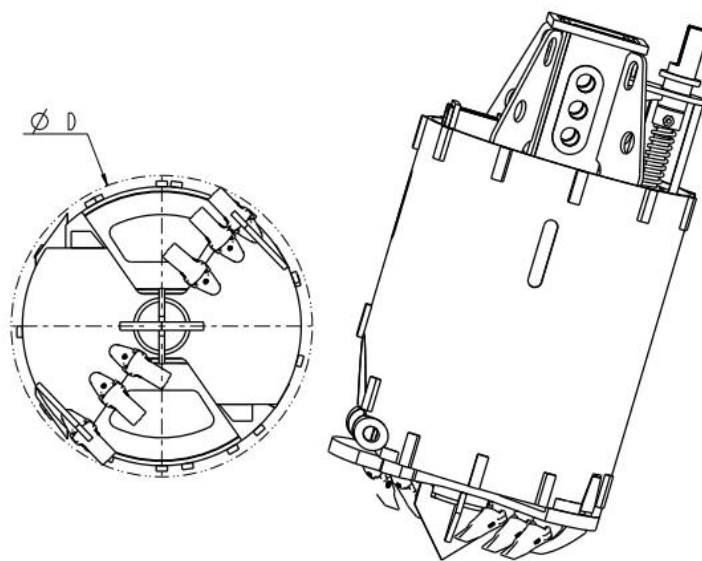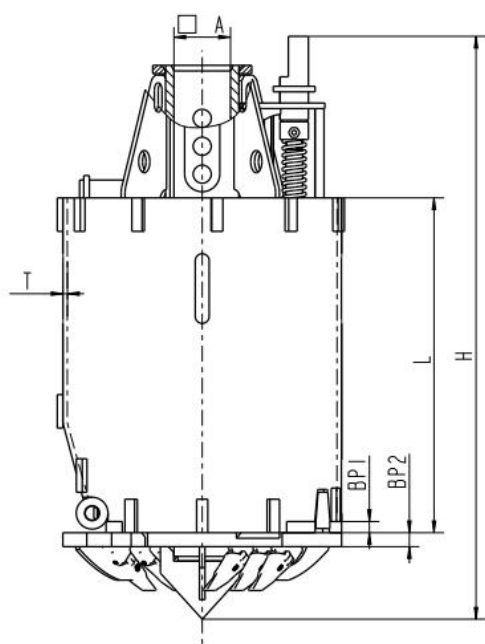


土层双底捞沙斗-锥筒

Conical Drilling Bucket With Soil Teeth

| 产品描述<br>Description                                                | 筒体高度 Shell<br>HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP1+BP2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|--------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 土层捞沙斗<br>600mm Conical<br>Drilling Bucket with<br>Soil Teeth | 1200                          | 16                            | 40+40                                 | 200                                | 640                  | 2100*600*600                     |

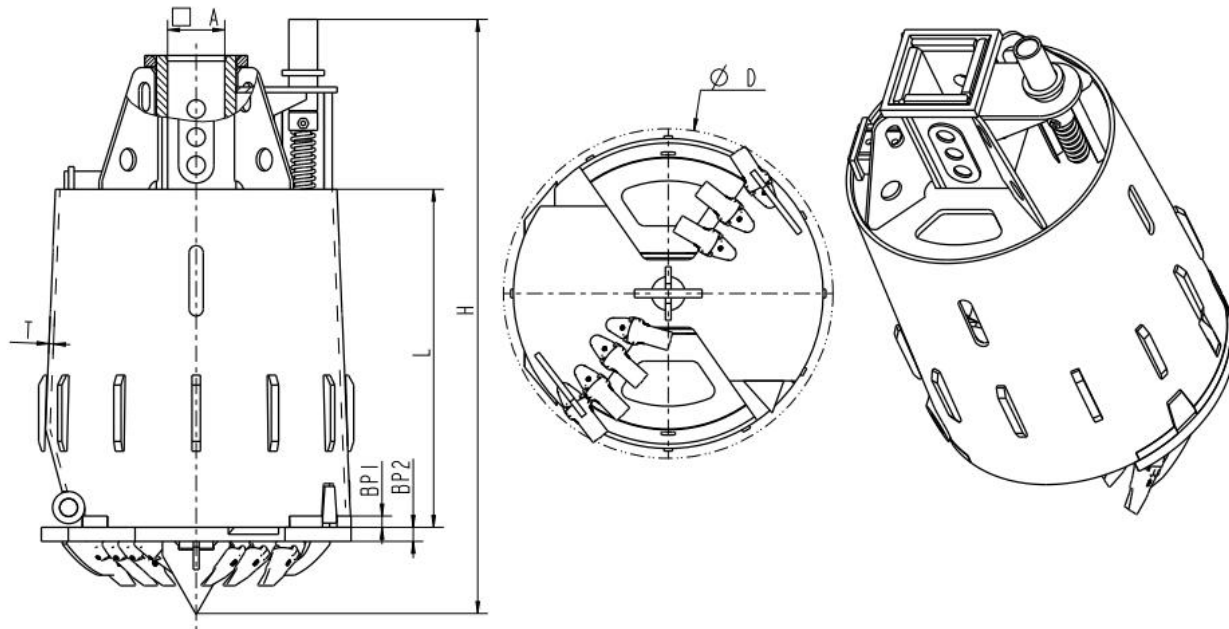


| 土层单底捞沙斗-直筒<br><b>Straight Single Bottom Drilling Bucket With Soil Teeth</b>         |                                      |                                      |                                        |                                           |                             |                                         |
|-------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------|----------------------------------------|-------------------------------------------|-----------------------------|-----------------------------------------|
| 产品描述<br><b>Description</b>                                                          | 筒体高度<br><b>Shell HIT.</b><br>(L)(mm) | 筒体壁厚<br><b>Shell THK.</b><br>(T)(mm) | 底板厚度<br><b>Bottom THK.</b><br>(BP)(mm) | 连接方尺寸<br><b>Kelly Box Size</b><br>(A)(mm) | 重量<br><b>Weight</b><br>(kg) | 运输尺寸<br><b>Dimension</b><br>(H*D*D)(mm) |
| 600mm 土层单底捞沙斗<br>600mm Straight Single<br>Bottom Drilling Bucket with<br>Soil Teeth | 1200                                 | 16                                   | 40                                     | 200                                       |                             | 2100*600*600                            |

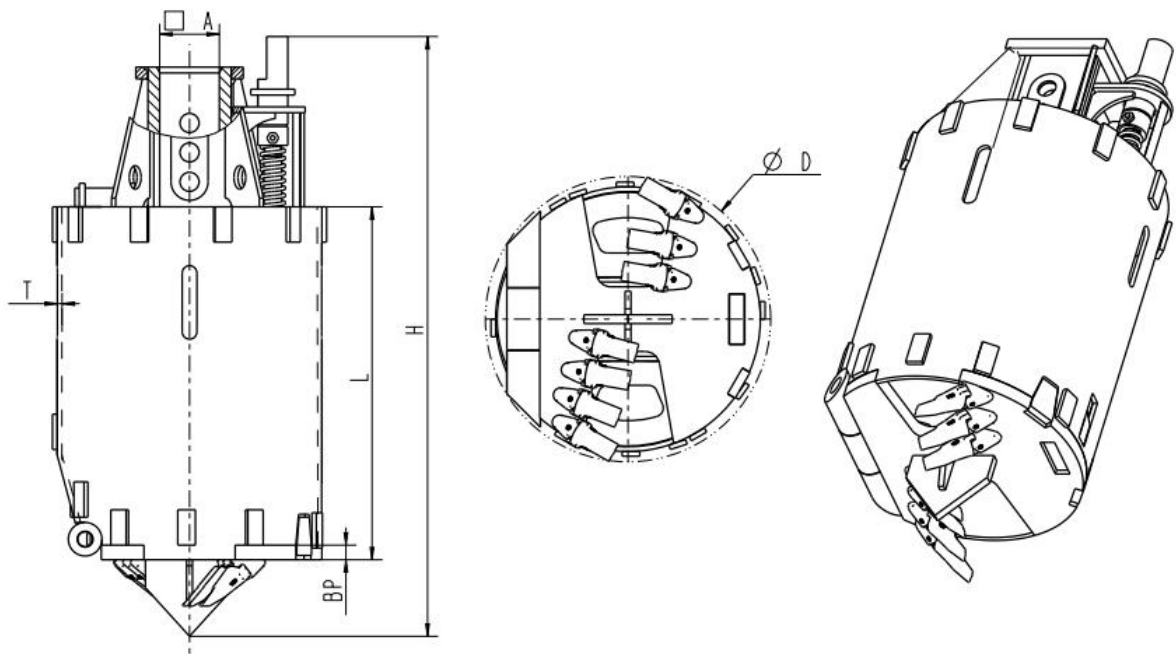

土层单底捞沙斗--锥筒

Conical Single Bottom Drilling Bucket With Soil Teeth




| 产品描述<br>Description                                                                | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|------------------------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 土层单底捞沙斗<br>600mm Conical Single<br>Bottom Drilling Bucket<br>with Soil Teeth | 1200                          | 16                            | 40                              | 200                                |                      | 2100*600*600                     |

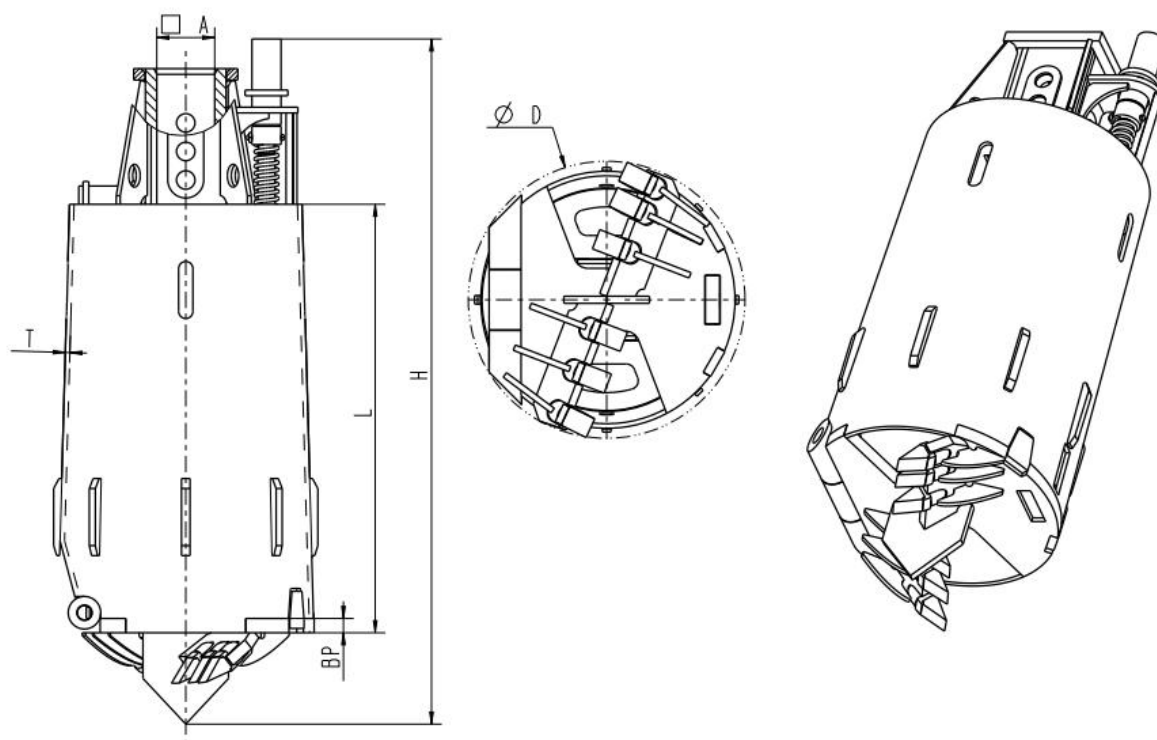




岩层单底捞沙斗-直筒

**Straight Single Bottom Drilling Bucket With Bullet Teeth**

| 产品描述<br>Description                                                                   | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------------------|-------------------------------|-------------------------------|----------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 岩层单底捞沙斗<br>600mm Straight Single<br>Bottom Drilling Bucket<br>with Bullet Teeth | 1200                          | 16                            | 40                               | 200                                | 640                  | 2100*600*600                     |

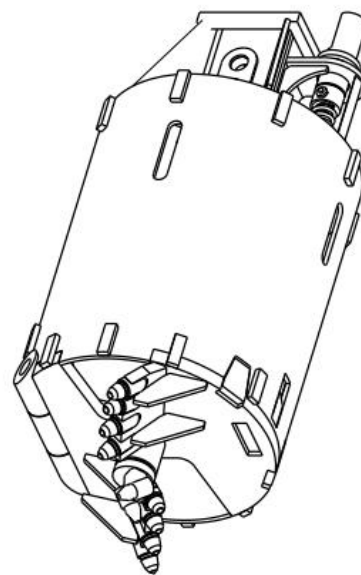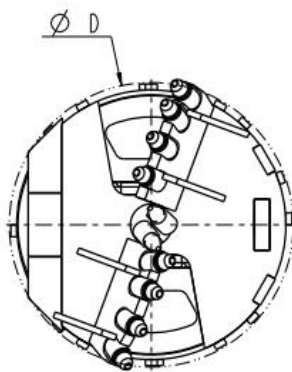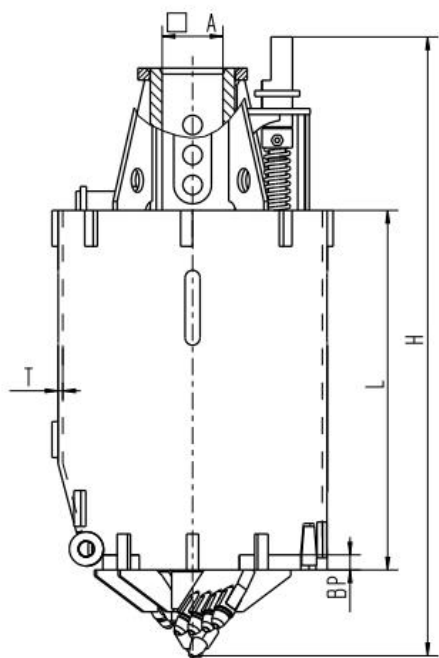




| <div>                     岩层单底捞沙斗-锥筒                     <div>Conical Single Bottom Drilling Bucket With Bullet Teeth</div> </div>                  |                                                                                                            |                                                                                                            |                                                                                                               |                                                                                                                 |                                                                                                   |                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| <div>                         产品描述                         <div>Description</div> </div>                                                            | <div>                         筒体高度                         <div>Shell HIT.</div> <div>(L)(mm)</div> </div> | <div>                         筒体壁厚                         <div>Shell THK.</div> <div>(T)(mm)</div> </div> | <div>                         底板厚度                         <div>Bottom THK.</div> <div>(BP) (mm)</div> </div> | <div>                         连接方尺寸                         <div>Kelly Box Size</div> <div>(A)(mm)</div> </div> | <div>                         重量                         <div>Weight</div> <div>(kg)</div> </div> | <div>                         运输尺寸                         <div>Dimension</div> <div>(H*D*D)(mm)</div> </div> |
| <div>                         600mm 岩层单底捞沙斗                         <div>600mm Conical Single Bottom Drilling Bucket with Bullet Teeth</div> </div> | 1200                                                                                                       | 16                                                                                                         | 40                                                                                                            | 200                                                                                                             | 640                                                                                               | 2100*600*600                                                                                                  |

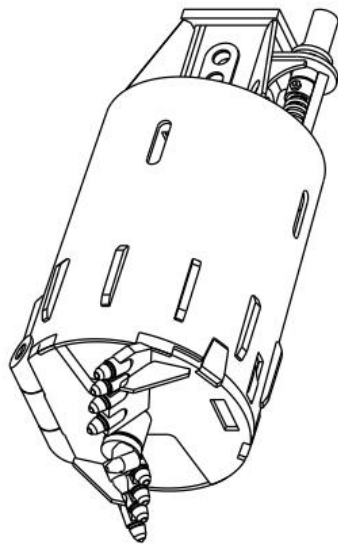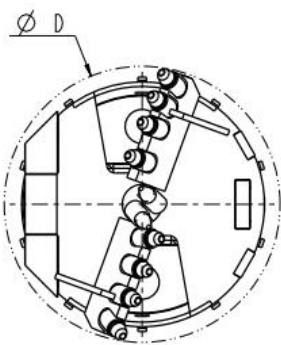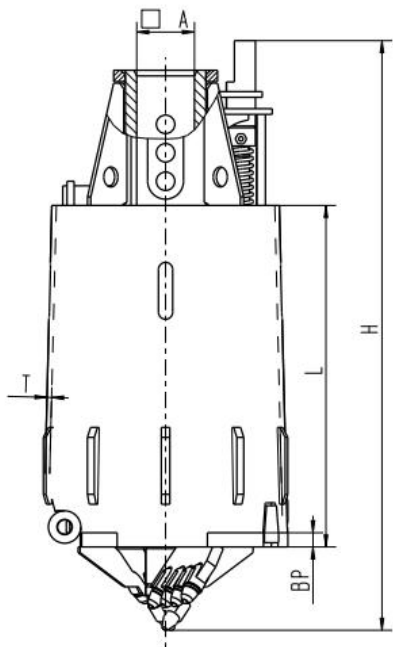

# 岩层捞沙斗-锥筒

## Conical Drilling Bucket With Bullet Teeth




| 产品描述<br>Description                                                  | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP1+BP2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|----------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 岩层捞沙斗<br>600mm Conical Drilling<br>Bucket with Bullet<br>Teeth | 1200                          | 16                            | 40+40                                 | 200                                | 640                  | 2100*600*600                     |

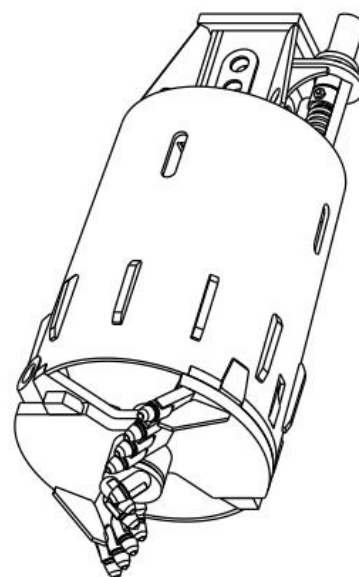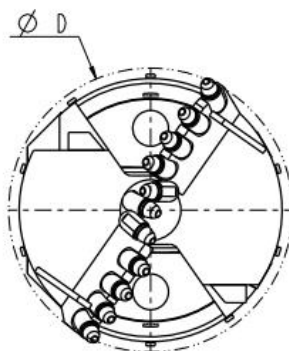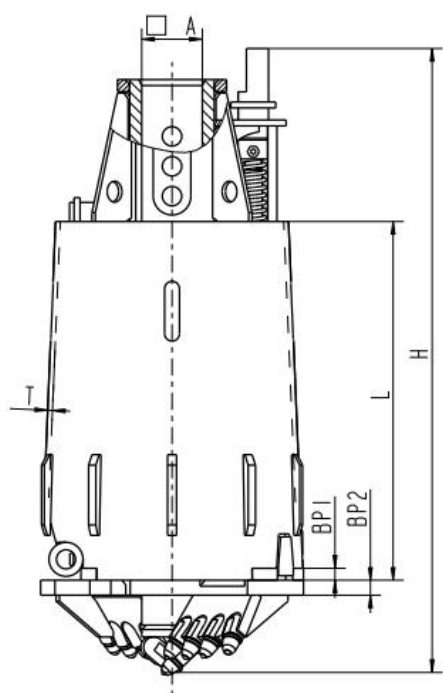

岩层捞沙斗-直筒

**Straight Drilling Bucket With Bullet Teeth**




| 产品描述<br>Description                                                  | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP1+BP2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|----------------------------------------------------------------------|-------------------------------|-------------------------------|---------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 岩层捞沙斗<br>600mmStraight<br>Drilling Bucket with<br>Bullet Teeth | 1200                          | 16                            | 40+40                                 | 200                                | 640                  | 2100*600*600                     |

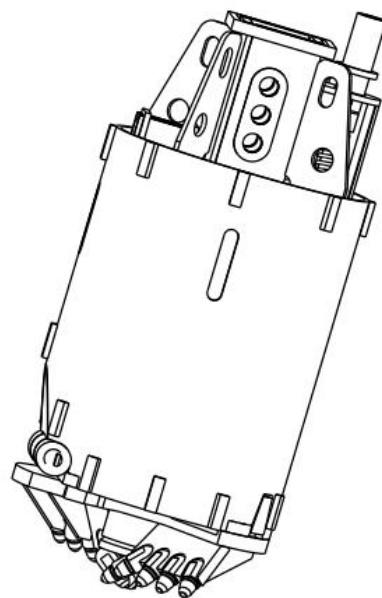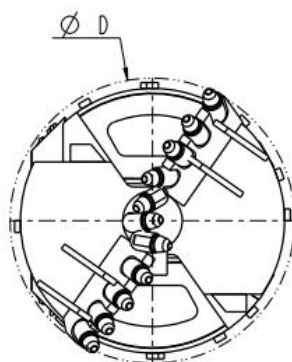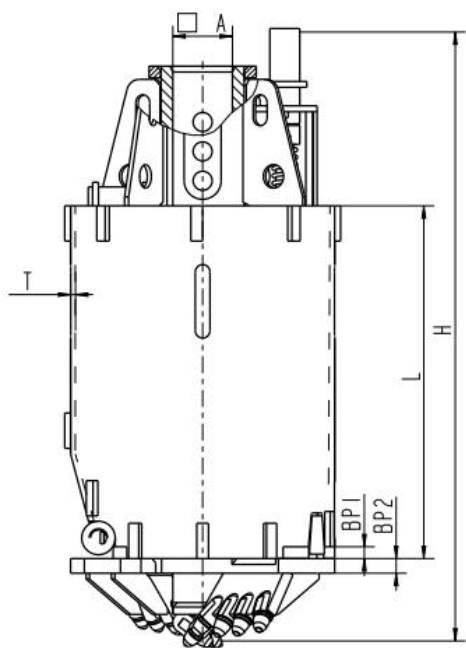

清孔钻斗

Cleaning Bucket




| 产品描述<br>Description                   | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T)(mm) | 底板厚度<br>Bottom THK.<br>(BP1+BP2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------|-------------------------------|-------------------------------|---------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 清孔钻斗<br>600mmCleaning<br>Bucket | 800                           | 16                            | 40+40                                 | 200                                |                      | 1800*600*600                     |

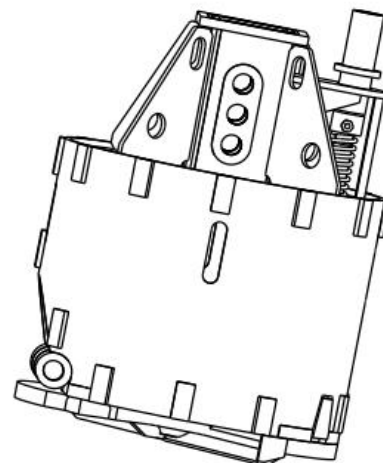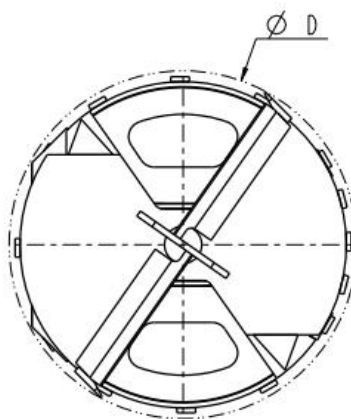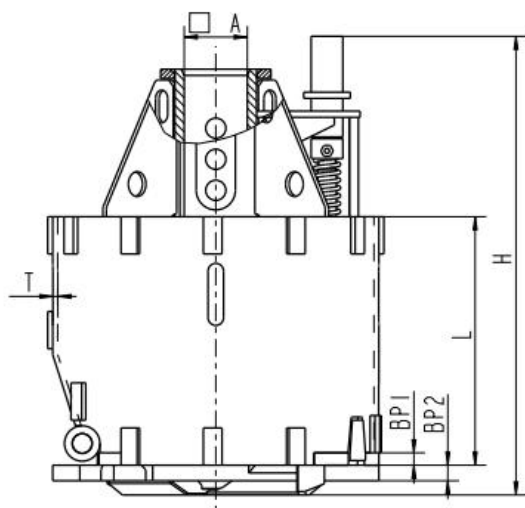

扩底钻斗

Belling Bucket




| 产品描述<br>Description                             | 规格<br>Model<br>(D1-D2) (mm) | 钻斗高度<br>Tools Height<br>(H1-H2) (mm) | 齿数<br>Teeth NO. | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H1*D1*D1) (mm) |
|-------------------------------------------------|-----------------------------|--------------------------------------|-----------------|------------------------------------|----------------------|--------------------------------------|
| 600-1200mm 扩底钻斗<br>600-1200mm Belling<br>Bucket | 600-1200                    |                                      |                 | 200                                |                      |                                      |

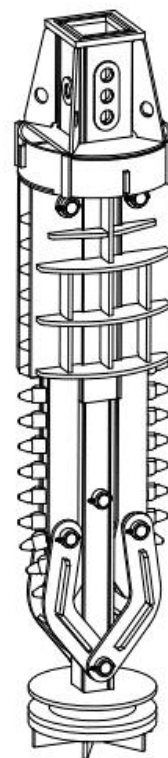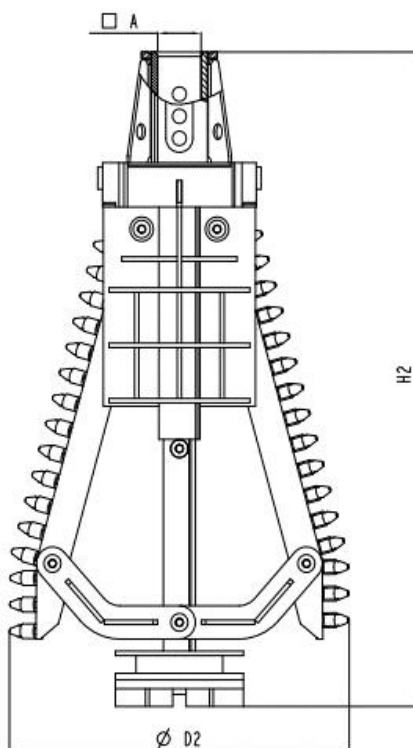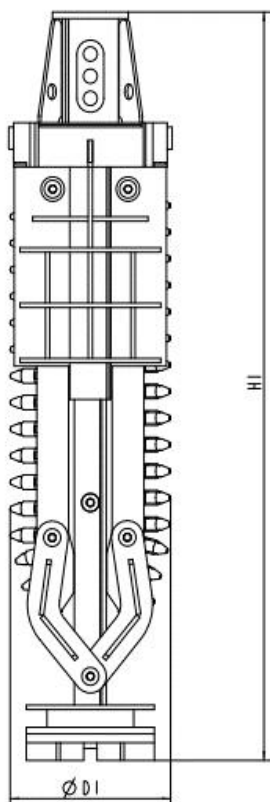

土层体开钻斗

Soil Open Type Drilling Bucket




| 产品描述<br>Description                                     | 筒体高度<br>Shell HIT.<br>(L)(mm) | 上筒体壁厚<br>Upper Shell<br>THK. (T1) (mm) | 加强圈厚度<br>Stiffening Ring<br>THK.<br>(T2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------|-------------------------------|----------------------------------------|-----------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 土层体开钻斗<br>600mm Soil Open<br>Type Drilling Bucket | 1200                          | 25                                     | 30                                            | 200                                |                      | 2100*600*600                     |

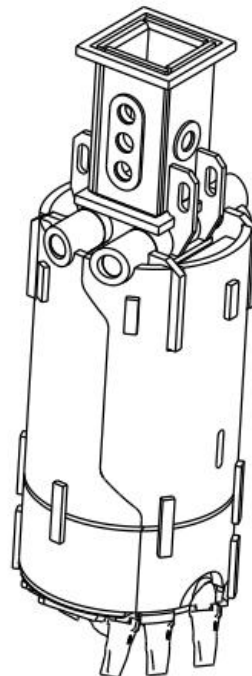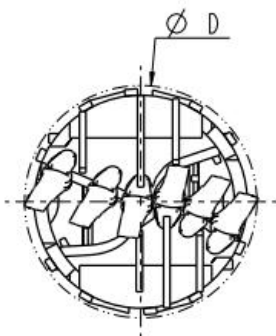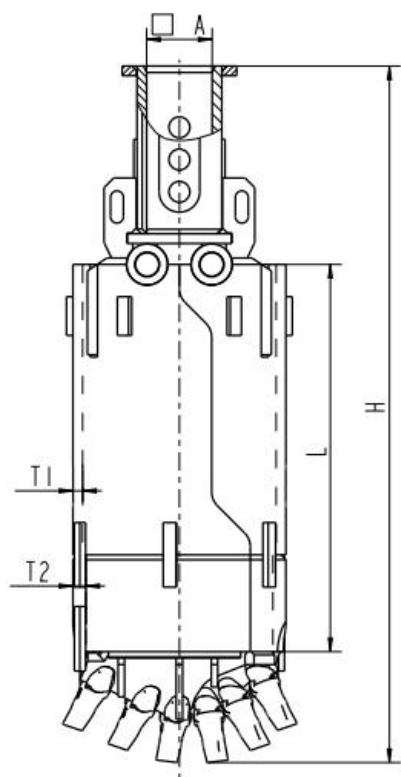

# 岩层体开钻斗

## Rock Open Type Drilling Bucket




| 产品描述<br>Description                                     | 筒体高度<br>Shell HIT.<br>(L)(mm) | 上筒体壁厚<br>Upper Shell THK.<br>(T1) (mm) | 加强圈壁厚<br>Stiffening Ring<br>THK.<br>(T2) (mm) | 连接方尺寸<br>Kelly Box<br>Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------|-------------------------------|----------------------------------------|-----------------------------------------------|---------------------------------------|----------------------|----------------------------------|
| 600mm 岩层体开钻斗<br>600mm Rock Open Type<br>Drilling Bucket | 1200                          | 25                                     | 30                                            | 200                                   |                      | 2100*600*600                     |

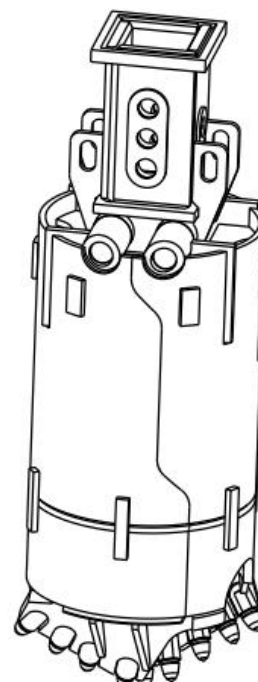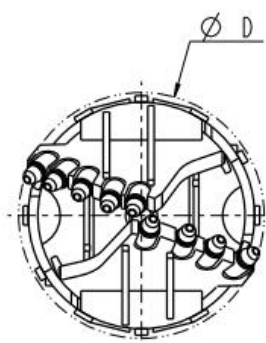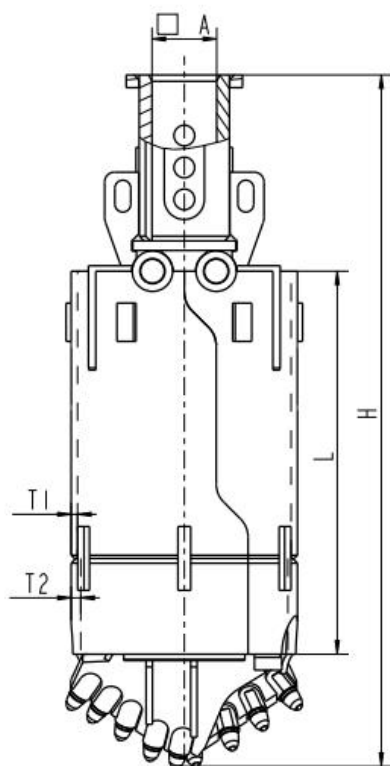




# 结合钻斗

## Rock Open Type Drilling Bucket

| 产品描述<br>Description                                   | 筒体高度<br>Shell HIT.<br>(L)(mm) | 上筒体壁厚<br>Upper Shell<br>THK. (T1) (mm) | 加强圈壁厚<br>Stiffening Ring<br>THK.<br>(T2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|-------------------------------------------------------|-------------------------------|----------------------------------------|-----------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 结合钻斗<br>600mm Rock Open<br>Type Drilling Bucket | 1200                          | 20                                     | 40                                            | 200                                |                      |                                  |

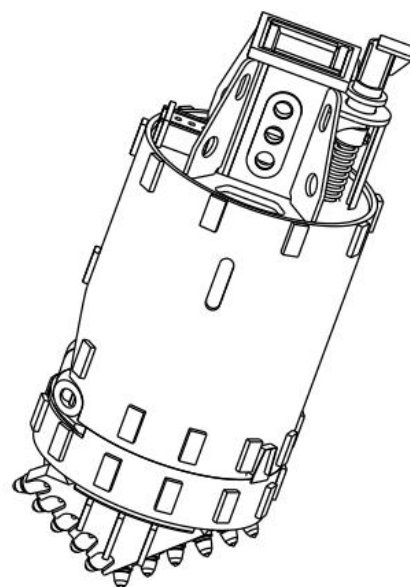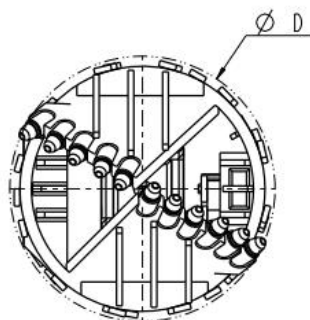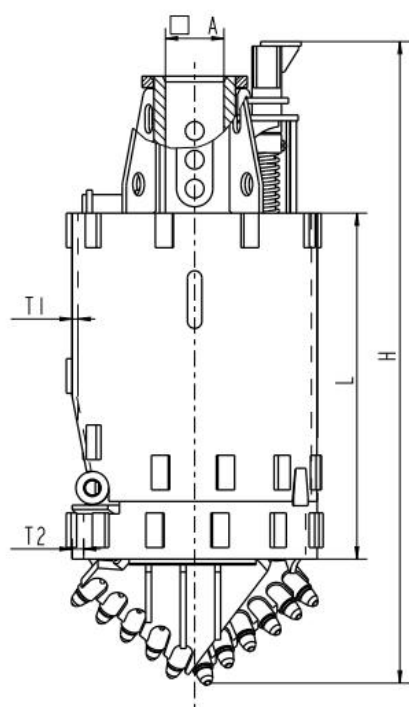




| 截齿筒钻<br>Core Barrel With Bullet Teeth                |                               |                                |                                              |                                    |                      |                                  |
|------------------------------------------------------|-------------------------------|--------------------------------|----------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 产品描述<br>Description                                  | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T1)(mm) | 加强圈壁厚<br>Stiffening Ring<br>THK.<br>(T2)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
| 600mm 截齿筒钻<br>600mm Core Barrel<br>With Bullet Teeth | 1200                          | 16                             | 20                                           | 200                                | 540                  | 1800*600*600                     |

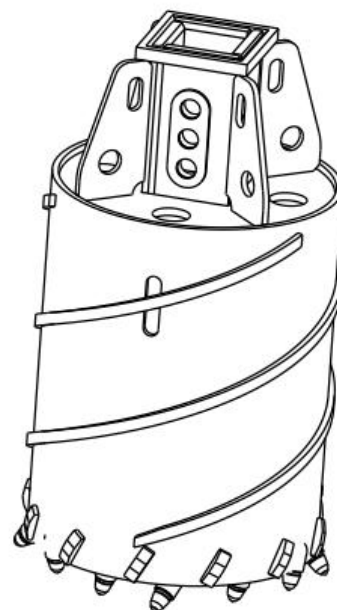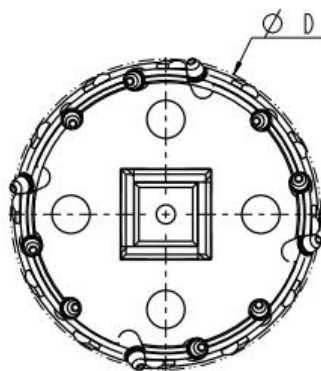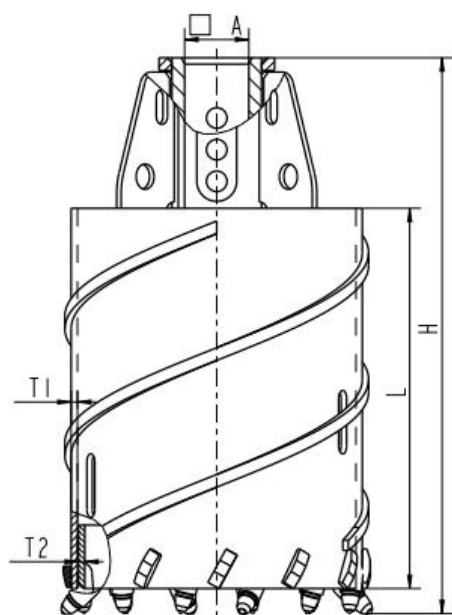

## 牙轮筒钻

### Core Barrel With Roller Bits




| 产品描述<br>Description                                   | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T1)(mm) | 加强圈厚度<br>Stiffening Ring<br>THK.<br>(T2)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 齿数<br>Teeth NO. | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|-------------------------------------------------------|-------------------------------|--------------------------------|----------------------------------------------|------------------------------------|-----------------|----------------------|----------------------------------|
| 600mm 牙轮筒钻<br>600mmCore<br>Barrel With Roller<br>Bits | 1200                          | 20                             | 20                                           | 200                                |                 | 600                  | 1800*600*600                     |

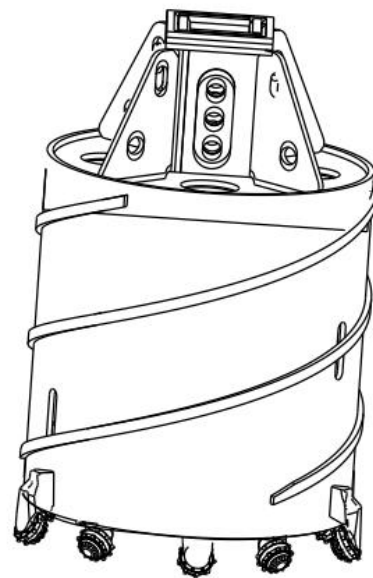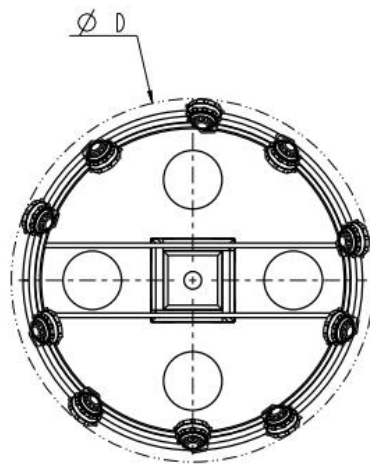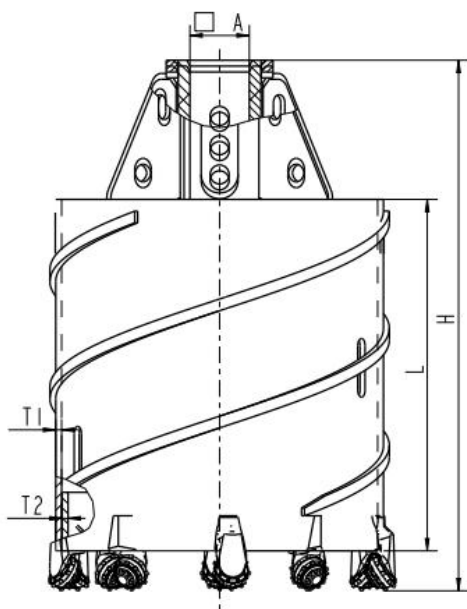

## 三叉戟筒钻

### Core Barrel With Crossing Cutter




| 产品描述<br>Description                                        | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T1)(mm) | 加强圈厚度<br>Stiffening Ring THK.<br>(T2)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|------------------------------------------------------------|-------------------------------|--------------------------------|-------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 三叉戟筒钻<br>600mmCore Barrel<br>With Crossing<br>Cutter |                               |                                |                                           |                                    |                      |                                  |

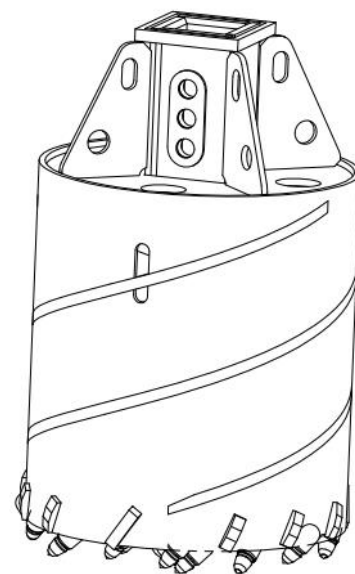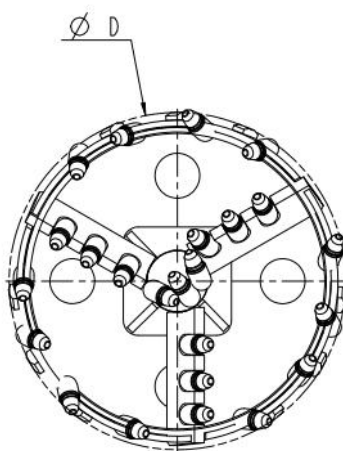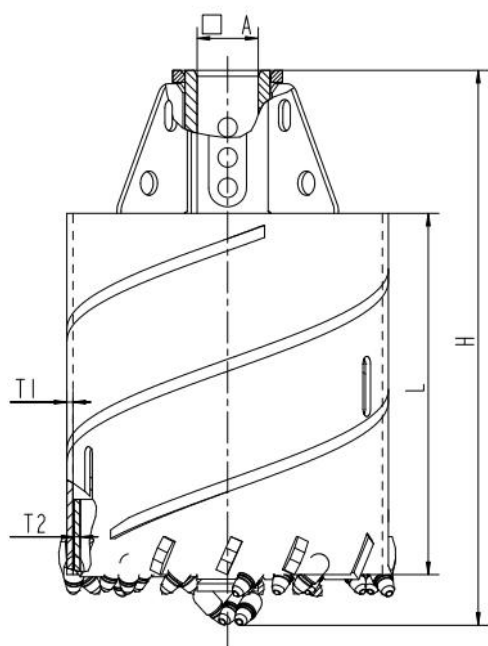

## 双层筒钻

### Core Barrel With Double Shell




| 产品描述<br>Description                                   | 直径<br>DIA.<br>(D1/D2)(mm) | 筒体高度<br>Shell HIT.<br>(L1/L2)(mm) | 筒体壁厚<br>Shell THK.<br>(T1/T2) (mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D1*D1)(mm) |
|-------------------------------------------------------|---------------------------|-----------------------------------|------------------------------------|------------------------------------|----------------------|------------------------------------|
| 1000mm 双层筒钻<br>1000mmCore Barrel<br>With Double Shell |                           |                                   |                                    |                                    |                      |                                    |

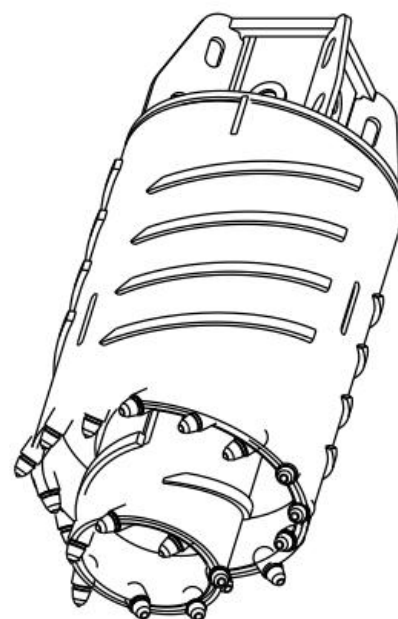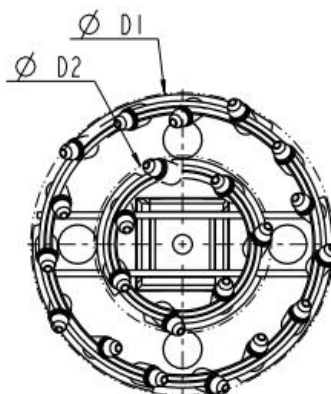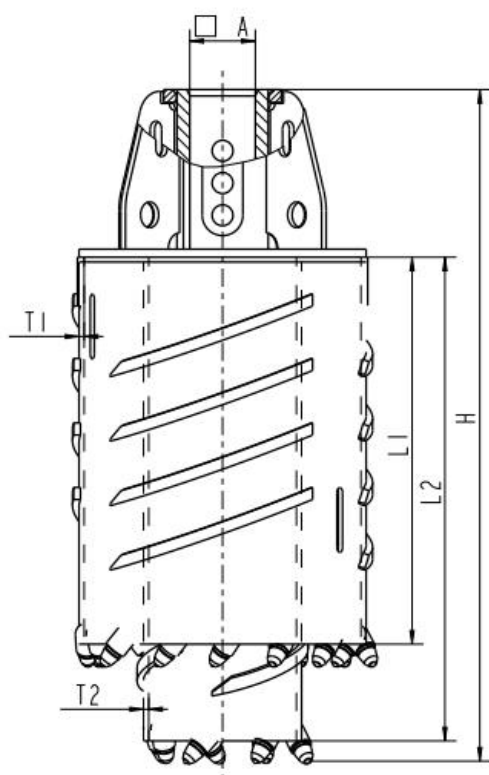

卵石筒钻

Core Barrel With Bullet Teeth




| 产品描述<br>Description                                 | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T1)(mm) | 加强圈厚度<br>Stiffening Ring THK.<br>(T2)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|-----------------------------------------------------|-------------------------------|--------------------------------|-------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 卵石筒钻<br>600mmCore Barrel<br>With Bullet Teeth |                               |                                |                                           |                                    |                      |                                  |

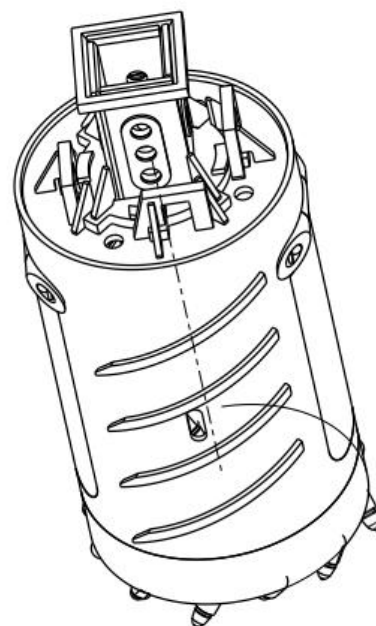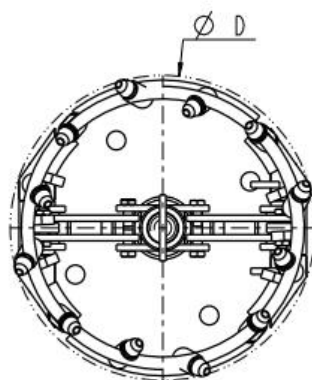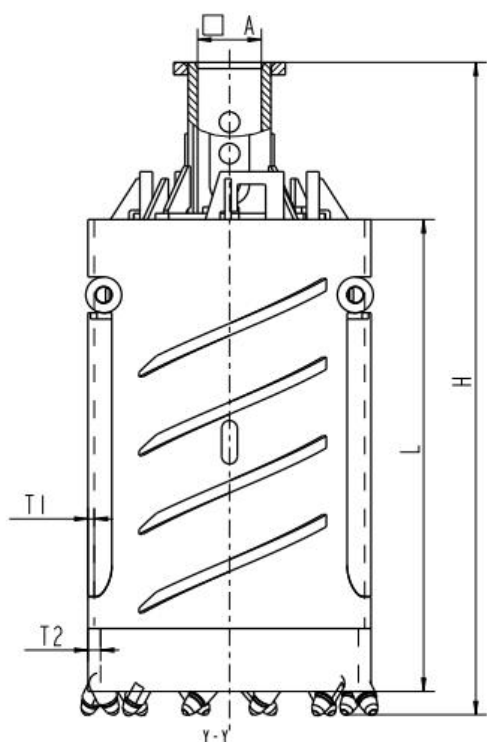

## 复合筒钻

### Core Barrel With Bullet Teeth


| 产品描述<br>Description                                 | 筒体高度<br>Shell HIT.<br>(L)(mm) | 筒体壁厚<br>Shell THK.<br>(T1)(mm) | 加强圈厚度<br>Stiffening Ring THK.<br>(T2)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|-----------------------------------------------------|-------------------------------|--------------------------------|-------------------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 复合筒钻<br>600mmCore Barrel<br>With Bullet Teeth | 1200                          | 16                             | 40                                        | 200                                |                      |                                  |

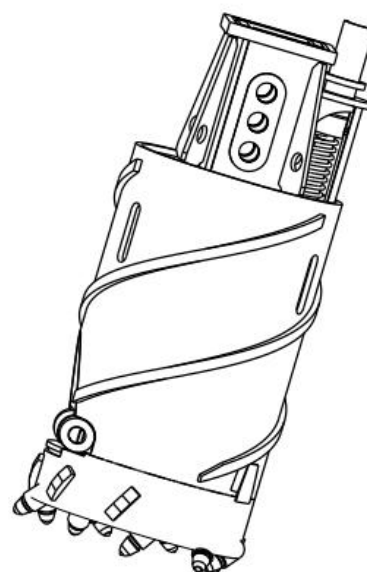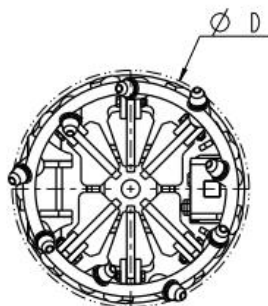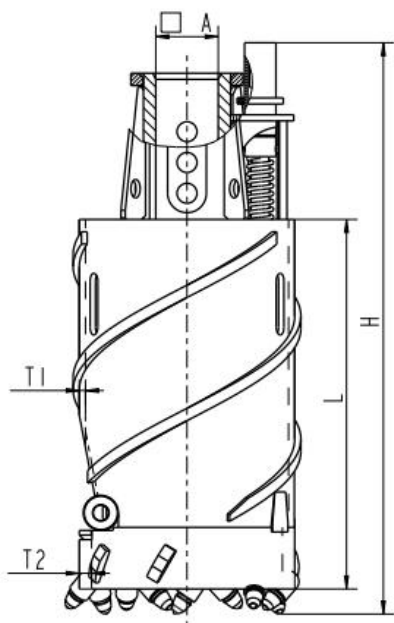

单直单螺土螺钻斗

Single Start Single Spiral Staright Soil Auger


| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 单直单螺土螺<br>600mmSingle Start<br>Single Spiral Staright<br>Soil Auger | 30+20                               | 200+400                              | 1000                              | 200                                | 560                  | 1800*600*600                   |

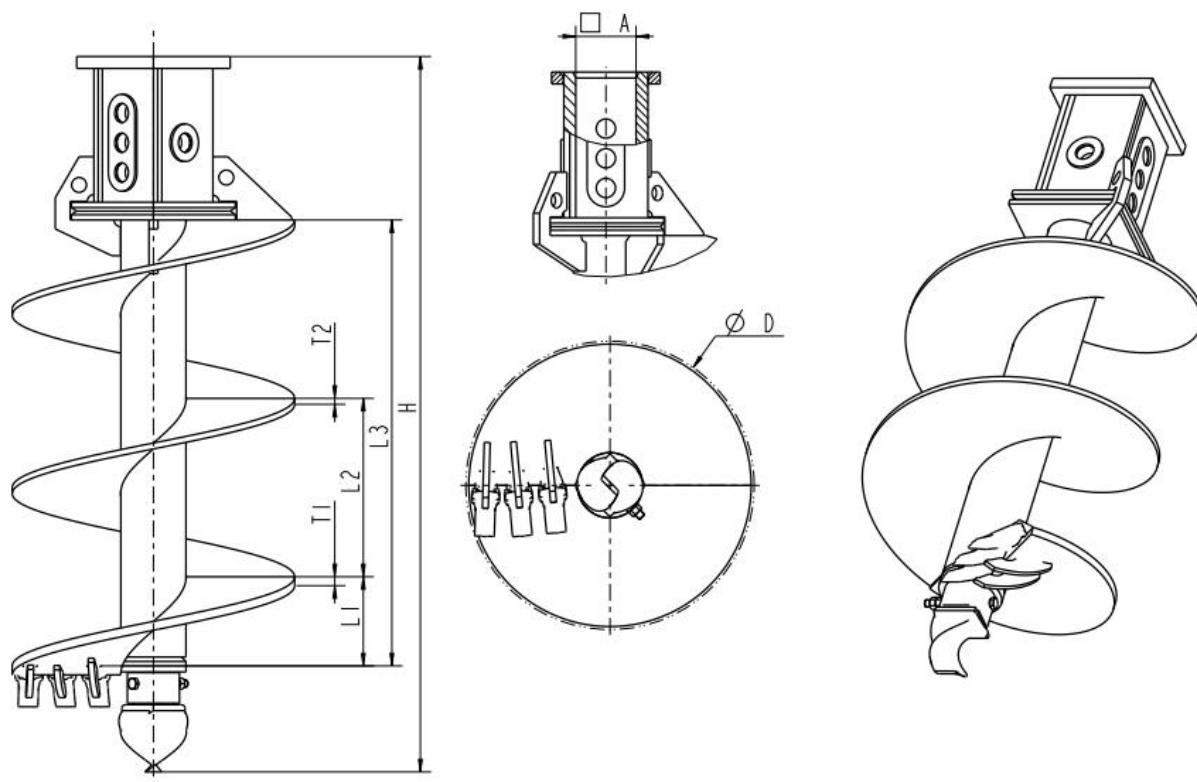

## 双直单螺土螺钻斗

### Double Start Single Spiral Straight Soil Auger


| 产品描述<br>Description                                                     | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|-------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 双直单螺土螺<br>600mm Double Start Single<br>Spiral Straight Soil Auger | 30+20                               | 200+400                              | 1000                              | 200                                | 560                  | 1800*600*600                   |

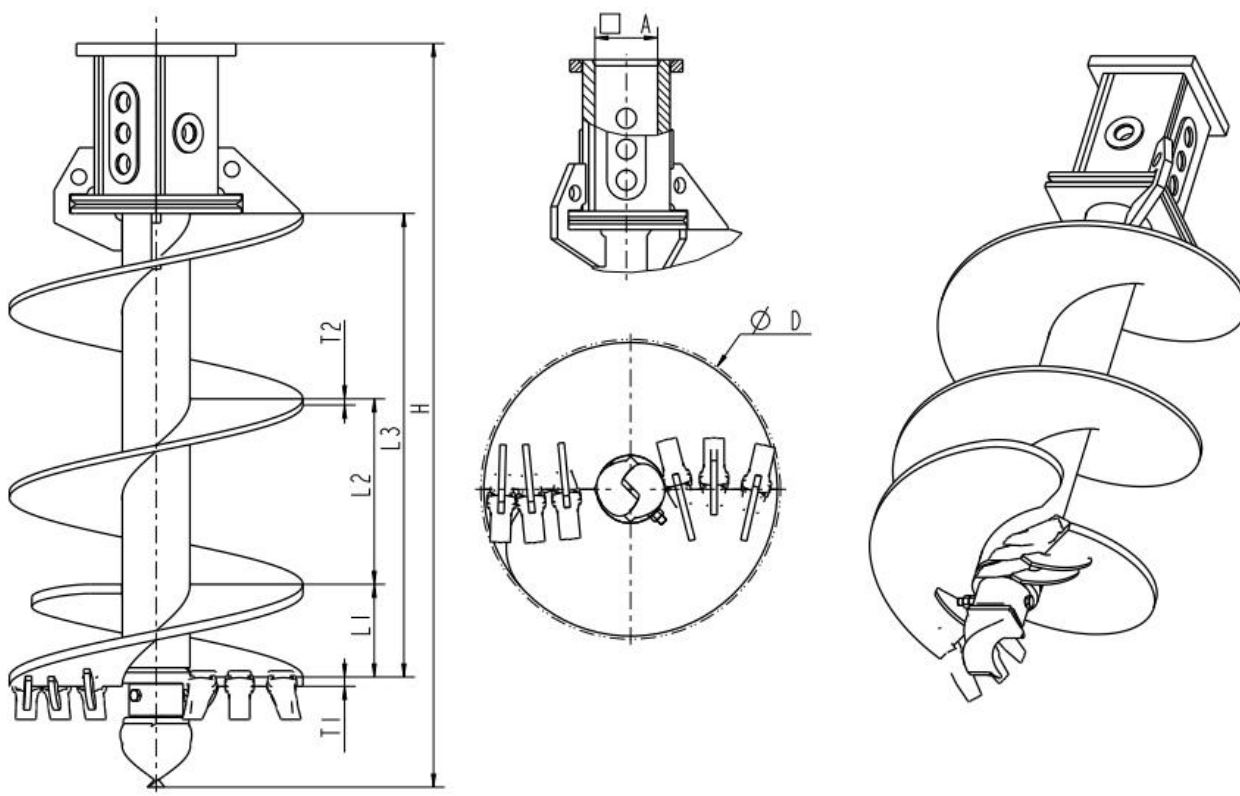


双直双螺土螺钻头

Double Start Double Spiral Straight Soil Auger

| 产品描述<br>Description                                                     | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
|-------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|----------------------------------|
| 600mm 双直双螺土螺<br>600mm Double Start Double<br>Spiral Straight Soil Auger | 30+20                               | 200+400                              | 1000                              | 200                                | 560                  | 1800*600*600                     |

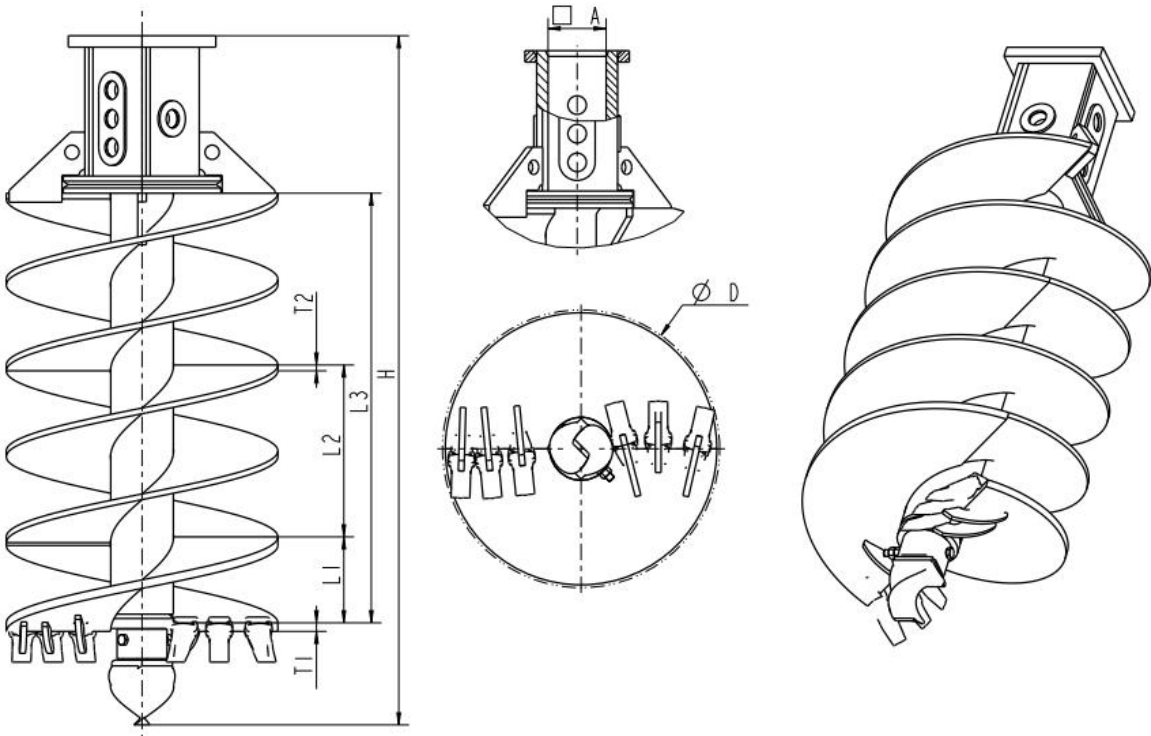


| 单锥单螺岩螺钻斗<br>Single Start Single Spiral Conical Rock Auger                 |                                     |                                      |                                   |                                    |                      |                                  |
|---------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|----------------------------------|
| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片厚度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 运输尺寸<br>Dimension<br>(H*D*D)(mm) |
| 500mm 单锥单螺岩螺<br>500mm Single Start<br>Single Spiral Conical<br>Rock Auger | 30+20                               | 400+400                              | 1000                              | 200                                |                      | 1800*600*600                     |

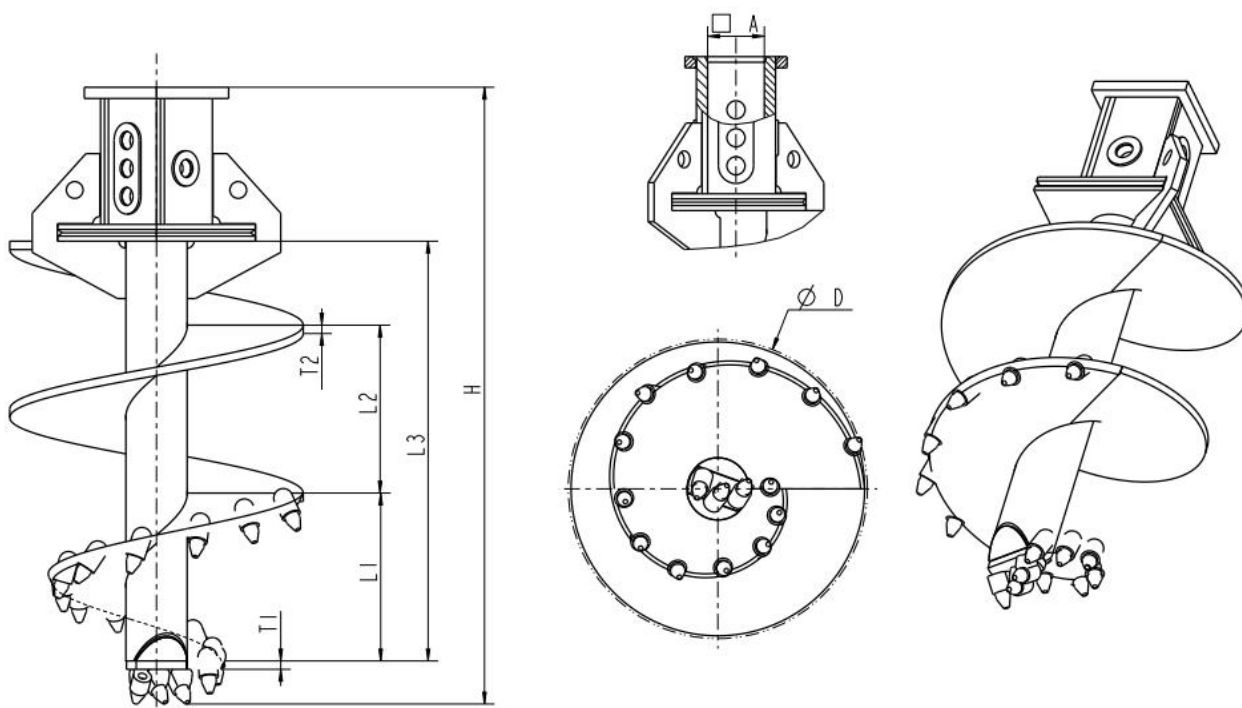

# 双锥单螺岩螺钻斗

## Double Start Single Spiral Conical Rock Auger


| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 双锥单螺岩螺<br>600mm Double Start<br>Single Spiral Conical Rock<br>Auger | 30+20                               | 400+400                              | 1000                              | 200                                |                      | 1800*600*600                   |

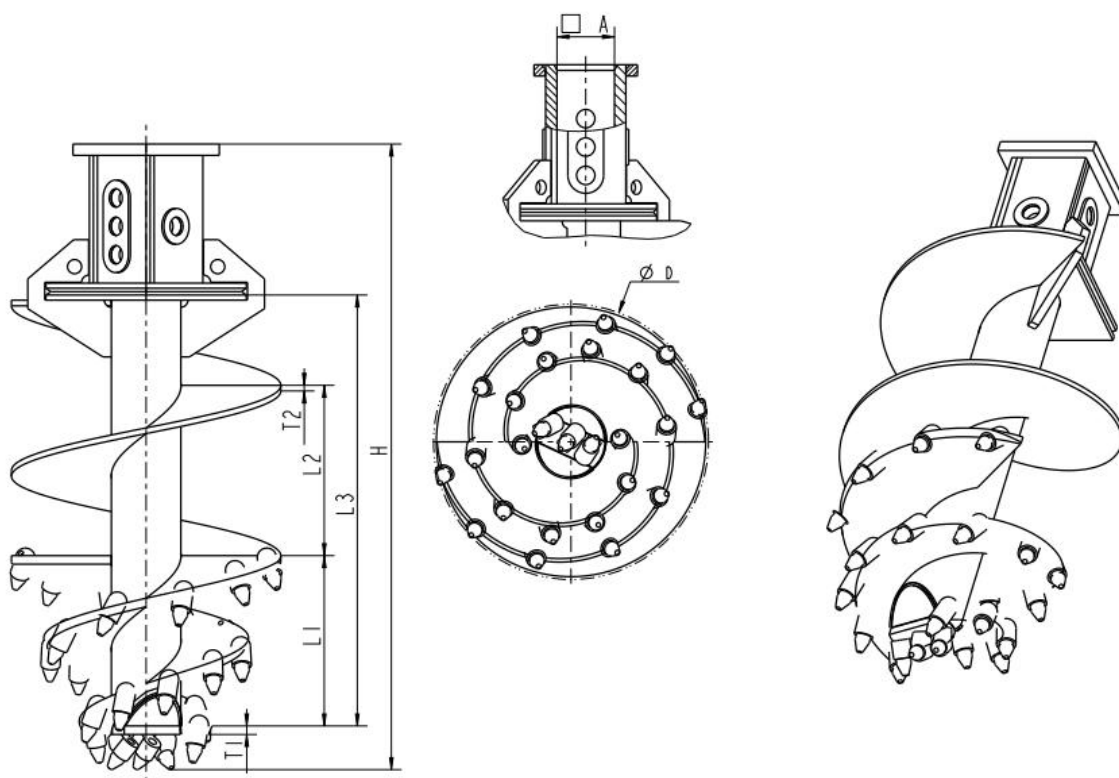

## 双锥双螺岩螺钻斗

### Double Start Double Spiral Conical Rock Auger


| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 双锥单螺岩螺<br>600mm Double Start<br>Double Spiral Conical<br>Rock Auger | 30+20                               | 400+400                              | 1000                              | 200                                |                      | 1800*600*600                   |

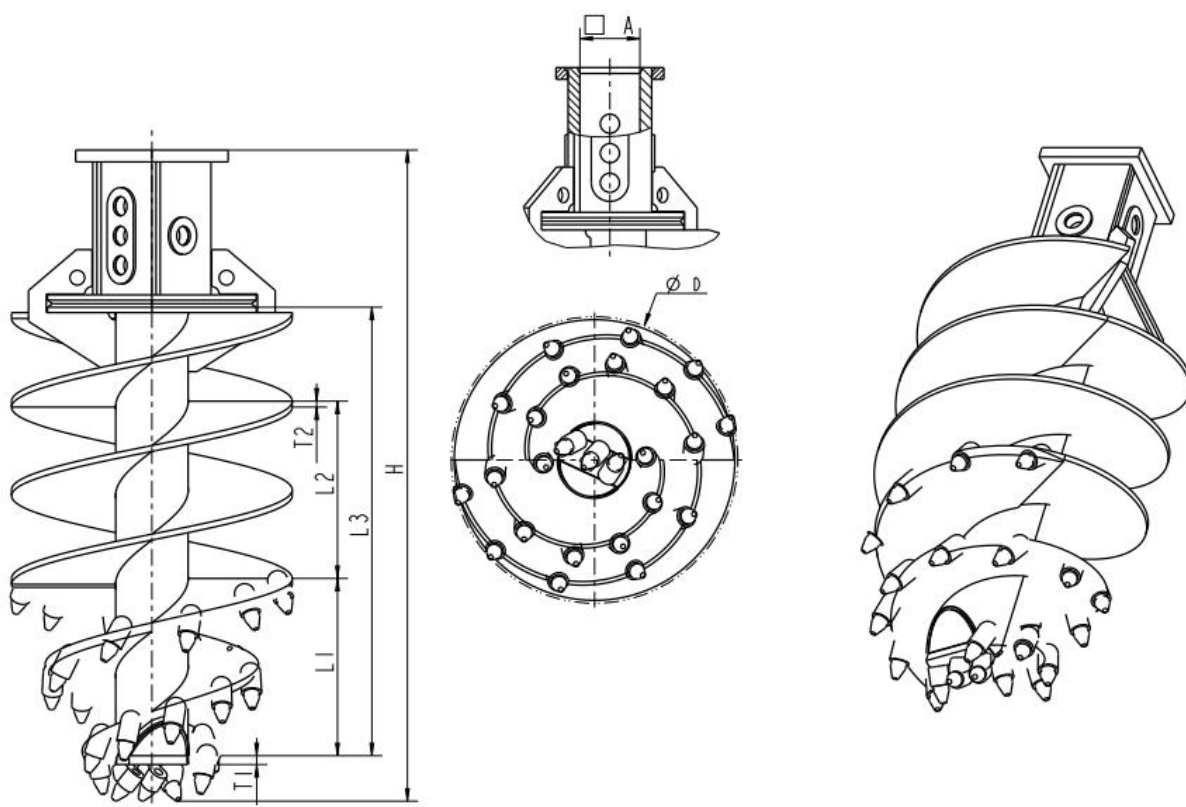

## 双直单螺岩螺钻斗

### Double Start Single Spiral Staright Rock Auger

| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2)(mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------|------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 双直单螺岩螺<br>600mmDouble Start<br>Single Spiral Straight<br>Rock Auger | 30+20                              | 200+400                              | 1000                              | 200                                | 560                  | 1800*600*600                   |

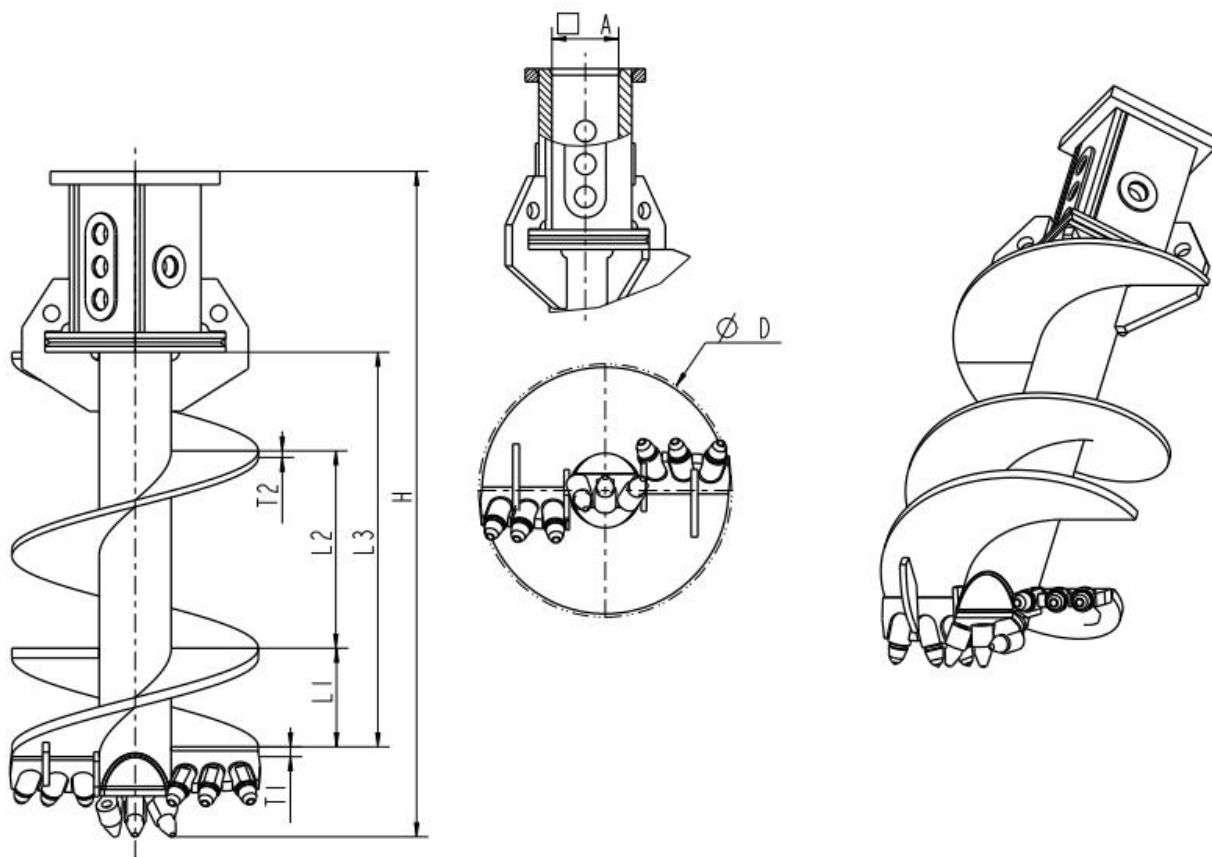

## 双直双螺岩螺钻斗

### Double Start Double Spiral Staright Rock Auger

| 产品描述<br>Description                                                       | 螺旋厚度<br>Spiral THK.<br>(T1+T2) (mm) | 螺旋间距<br>Spiral Pitch<br>(L1+L2) (mm) | 螺旋叶片高度<br>Spiral HIT.<br>(L3)(mm) | 连接方尺寸<br>Kelly Box Size<br>(A)(mm) | 重量<br>Weight<br>(kg) | 尺寸<br>Dimension<br>(H*D*D)(mm) |
|---------------------------------------------------------------------------|-------------------------------------|--------------------------------------|-----------------------------------|------------------------------------|----------------------|--------------------------------|
| 600mm 双直双螺岩螺<br>600mmDouble Start<br>Double Spiral Straight<br>Rock Auger | 30+20                               | 200+400                              | 1000                              | 200                                |                      | 1800*600*600                   |

